

## DE620TN 8 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	<b>36 mm (1.4 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>7.9 Ω</b>
Nominal Power Handling	<b>80 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>160 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>107 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>1 kHz - 18 kHz</b>
Recommended Crossover	<b>1.2 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>65 mm (2.5 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.15 mH</b>
Flux Density	<b>1.8 T</b>
Diaphragm Material	<b>Titanium</b>

- 160 W continuous program power capacity
- 1.4' horn throat diameter
- 65 mm (2.5 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 18000 Hz response
- 107 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

### MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	<b>115 mm (4.5 in)</b>
Depth	<b>52 mm (2 in)</b>
Net Weight	<b>1.75 kg (3.85 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>1.79 kg (3.94 lb)</b>
Shipping Box	<b>120x120x65 mm (4.72x4.72x2.56 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMD620TN8M</b>
--------------------------	-------------------



**DE620TN** 8 Ω

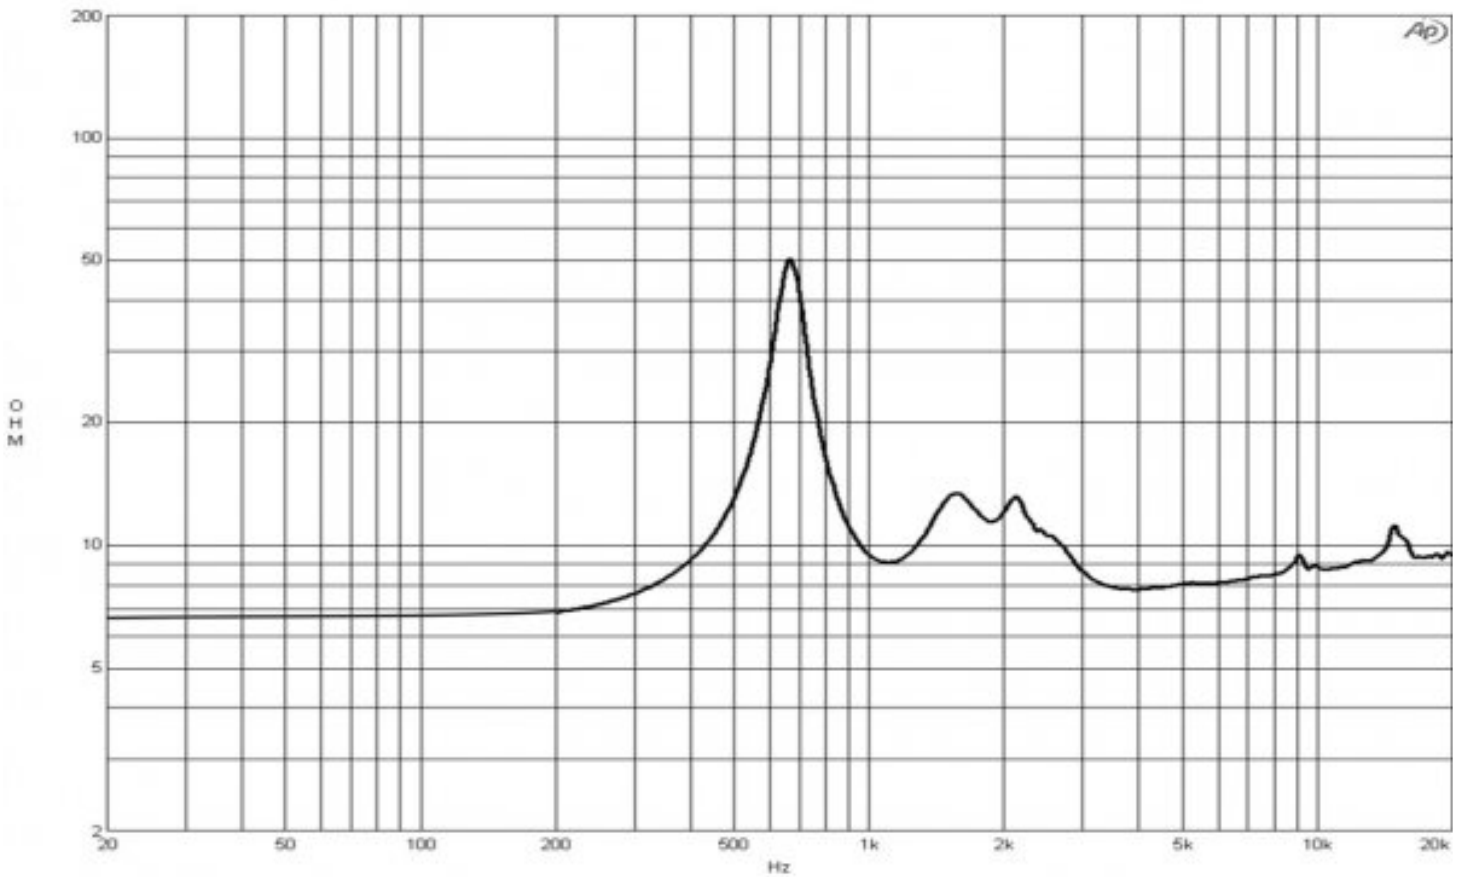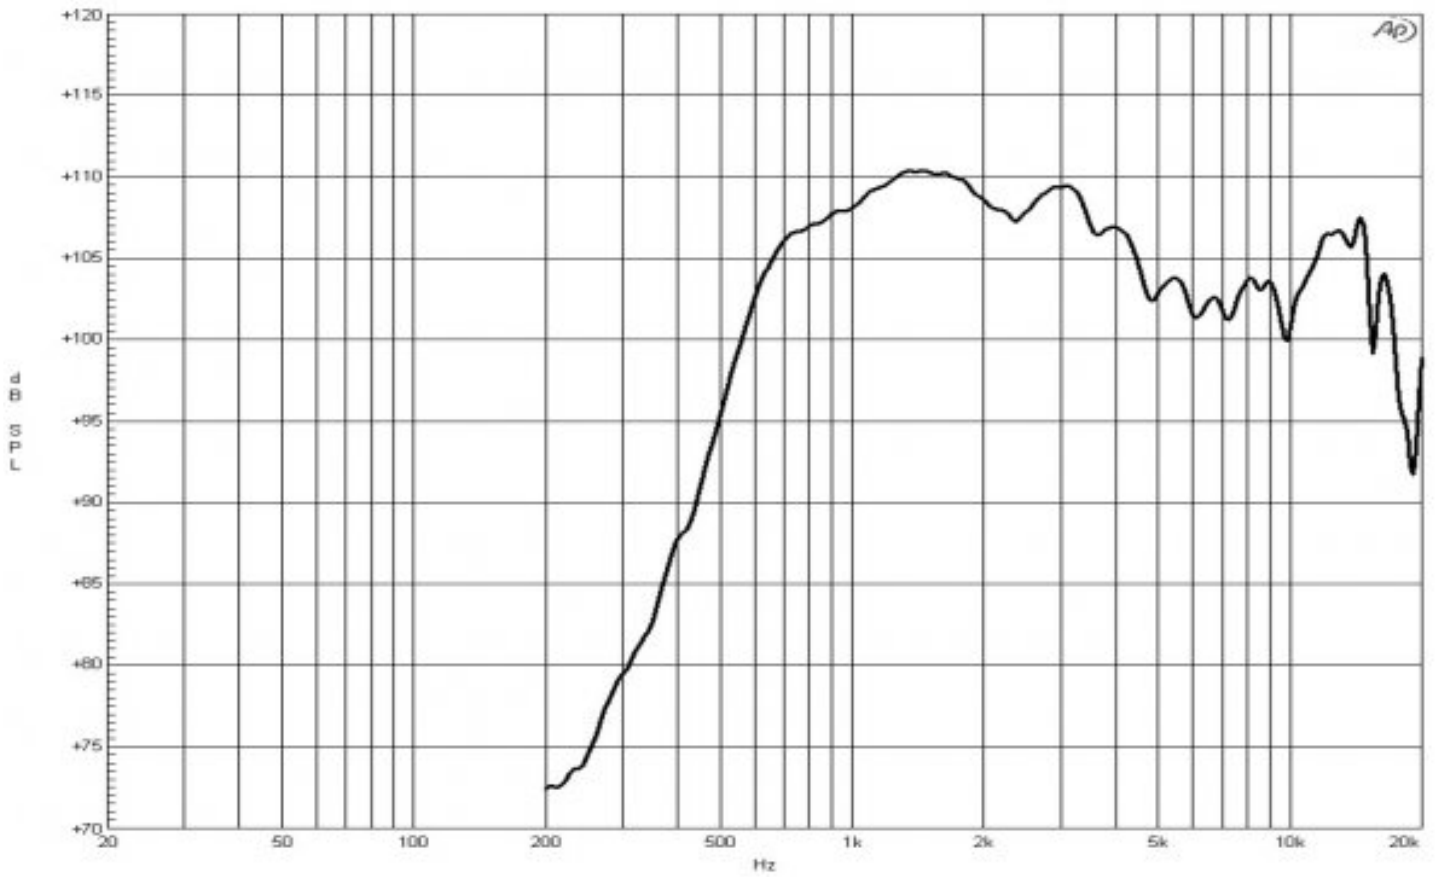

**DE620TN** 8 Ω

