

**8FMB51** 8 Ω

## Mid-Bass

- 500 W continuous program power capacity
- 51 mm (2 in) aluminium voice coil
- 67 - 4500 Hz response
- 96.5 dB sensitivity
- Ventilated voice coil gap for reduced power compression

The FMB series mid-bass woofers from B&C Speakers offer acoustic designers a new range of high efficiency, wide bandwidth alternatives that are not currently available in the B&C range. These full-featured transducers incorporate lower cost ferrite motors, inside/outside wound copper clad aluminum wire voice coils, weatherproof impregnated paper cones, and a symmetrical inductance profile. The FMB Series is especially well suited for two-way loudspeaker enclosures.



**8FMB51 8 Ω**

## Mid-Bass

**SPECIFICATIONS**

Nominal Diameter	<b>200 mm (8 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>5.5 Ω</b>
Nominal Power Handling	<b>250 W</b>
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	<b>500 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>96.5 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>67 Hz - 4500 Hz</b>
Voice Coil Diameter	<b>51 mm (2 in)</b>
Winding Material	<b>Aluminium</b>
Former Material	<b>Glass Fibre</b>
Winding Depth	<b>15 mm (0.59 in)</b>
Magnetic Gap Depth	<b>8 mm (0.31 in)</b>
Flux Density	<b>1.19 T</b>
Woofers Cone Treatment	<b>Waterproof Impregnated Cone</b>

**PARAMETERS**

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	<b>67 Hz</b>
Re	<b>4.7 Ω</b>
Qes	<b>0.31</b>
Qms	<b>3.07</b>
Qts	<b>0.28</b>
Vas	<b>20.7 dm<sup>3</sup> (0.73 ft<sup>3</sup>)</b>
Sd	<b>227 cm<sup>2</sup> (35.19 in<sup>2</sup>)</b>
η <sub>0</sub>	<b>1.91 %</b>
X <sub>max</sub>	<b>5.5 mm</b>
X <sub>var</sub>	<b>5 mm</b>
M <sub>ms</sub>	<b>20.2 g</b>
Bl	<b>11.3 Tm</b>
Le	<b>0.48 mH</b>
EBP	<b>216 Hz</b>

**DESIGN**

Surround Shape	<b>Triple Roll</b>
Cone Shape	<b>Curvilinear</b>
Magnet Material	<b>Ferrite</b>
Spider	<b>Single</b>
Pole Design	<b>T-Pole</b>
Woofers Cone Treatment	<b>Waterproof Impregnated Cone</b>
Recommended Enclosure	<b>14 dm<sup>3</sup> (0.49 ft<sup>3</sup>)</b>
Recommended Tuning	<b>80 Hz</b>

**MOUNTING AND SHIPPING INFO**



Overall Diameter	<b>225 mm (8.86 in)</b>
Bolt Circle Diameter	<b>210 mm (8.27 in)</b>
Baffle Cutout Diameter	<b>187 mm (7.36 in)</b>
Depth	<b>92 mm (3.62 in)</b>
Flange and Gasket Thickness	<b>9 mm (0.35 in)</b>
Air Volume Occupied by Driver	<b>1.2 dm<sup>3</sup> (0.04 ft<sup>3</sup>)</b>
Net Weight	<b>3.4 kg (7.5 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>3.85 kg (8.49 lb)</b>
Shipping Box	<b>255x255x150 mm (10.04x10.04x5.91 in)</b>


**SERVICE KITS**

LF recone-kits	<b>RCK008FMB518</b>
----------------	---------------------

**8FMB51 8 Ω**

**Mid-Bass**

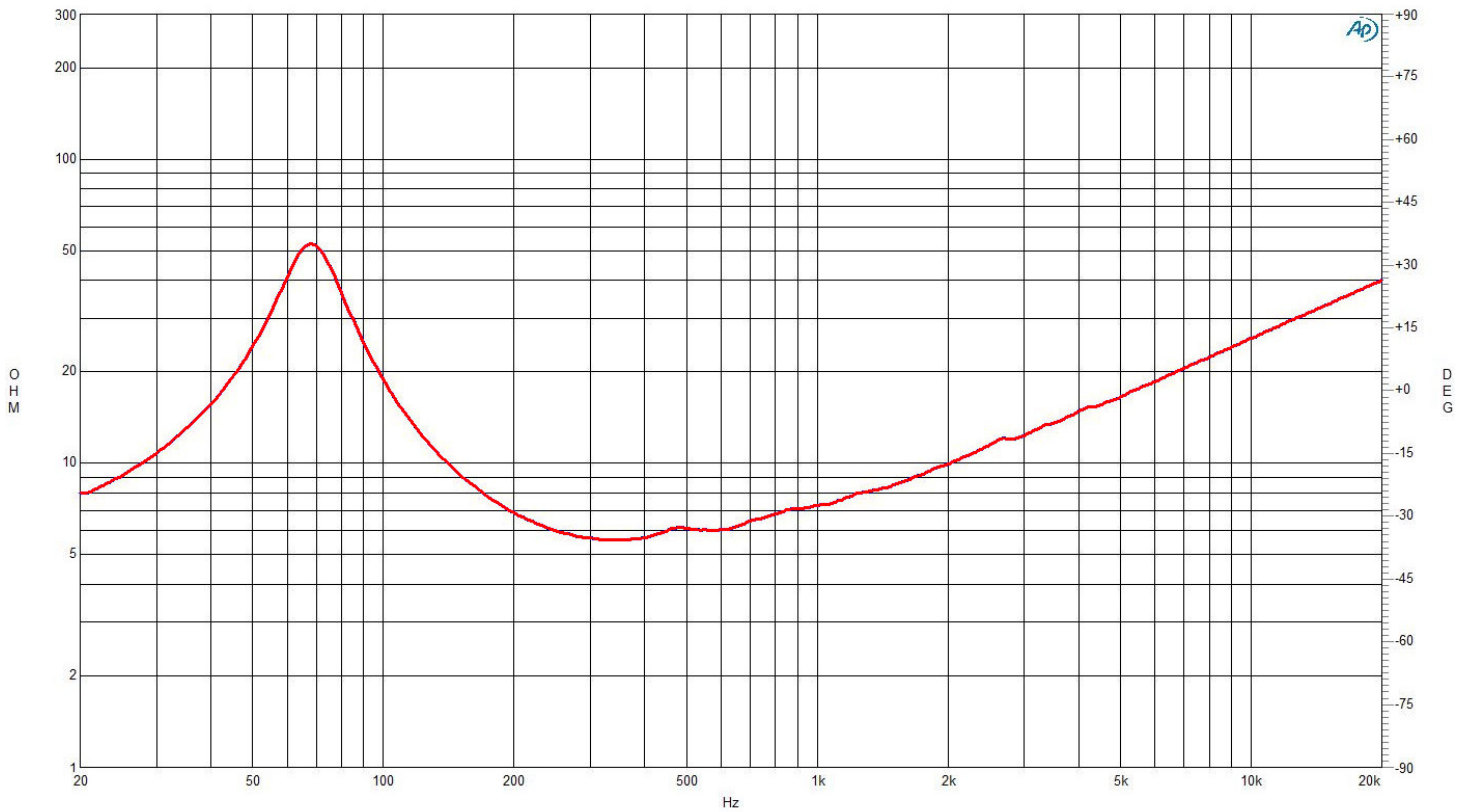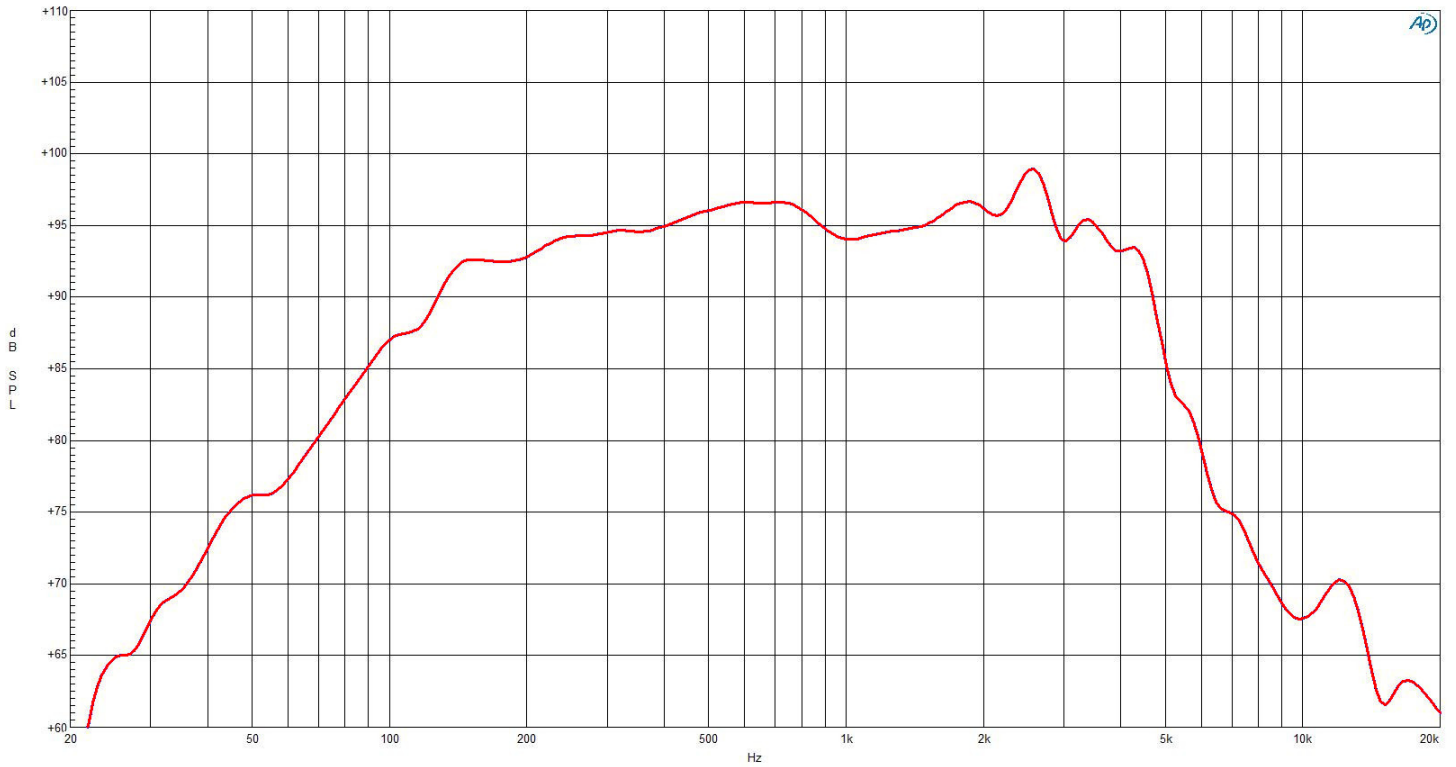

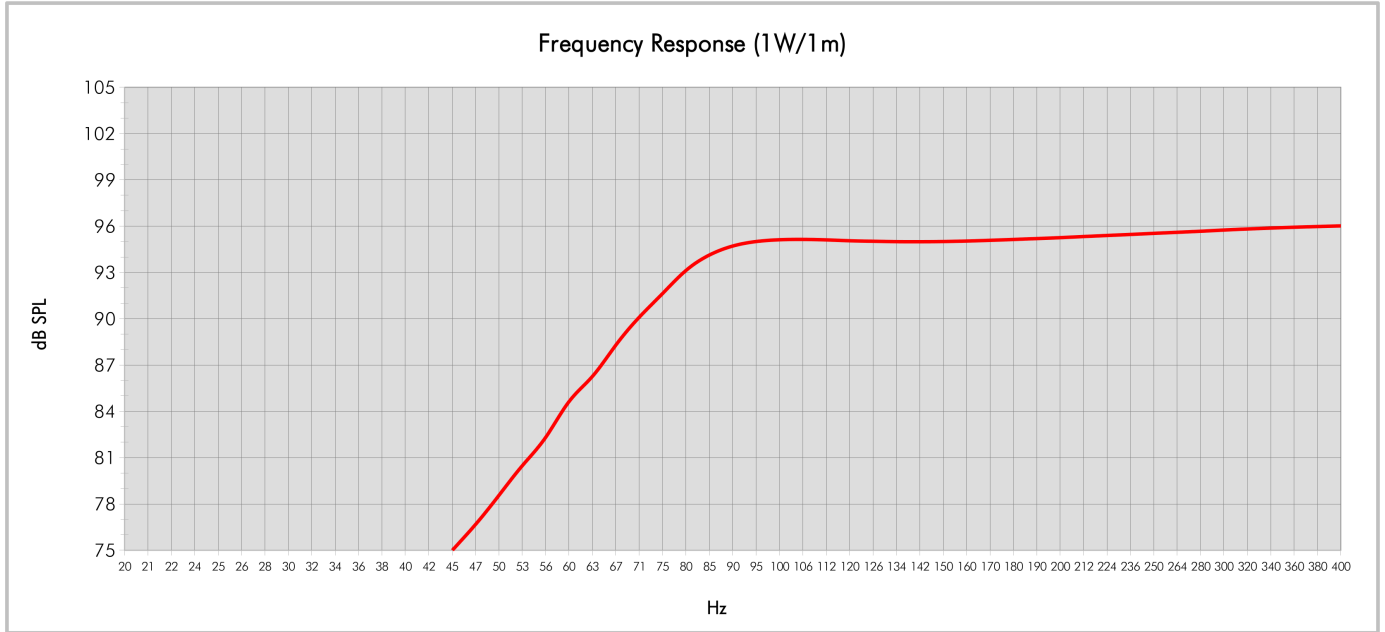

Model:	<b>8FMB51</b>	Configuration:	<b>One Driver</b>
Enclosure Type:	<b>Bass Reflex</b>		
Internal Net Volume (Litres):	<b>14</b>	QB:	<b>7</b>
Tuning Frequency (Hz):	<b>80</b>	Port Area (cm <sup>2</sup> ):	<b>51,0</b>
Frequency (-3 dB) (Hz):	<b>81,7</b>	Port Length (cm):	<b>10,1</b>
Frequency (-10 dB) (Hz):	<b>63,4</b>		

**8FMB51** 8 Ω

Mid-Bass

