

## DE60TN 16 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	<b>36 mm (1.4 in)</b>
Nominal Impedance	<b>16 Ω</b>
Minimum Impedance	<b>11.1 Ω</b>
Nominal Power Handling	<b>110 W</b>
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	<b>220 W</b>
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	<b>107.5 dB</b>
<small>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.</small>	
Frequency Range	<b>1 kHz - 18 kHz</b>
Recommended Crossover	<b>1.2 kHz</b>
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	<b>75 mm (3 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.14 mH</b>
Flux Density	<b>1.6 T</b>
Diaphragm Material	<b>Titanium</b>

- 220 W continuous program power capacity
- 1.4" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- 1000 - 18000 Hz response
- 107.5 dB sensitivity
- Shorting copper cap for extended HF response

### MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	<b>156 mm (6.1 in)</b>
Depth	<b>66 mm (2.6 in)</b>
Net Weight	<b>3.8 kg (8.38 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>3.92 kg (8.64 lb)</b>
Shipping Box	<b>190x190x80 mm</b> <b>(7.48x7.48x3.15 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMD3BTN16M</b>
--------------------------	-------------------



**DE60TN** 16 Ω

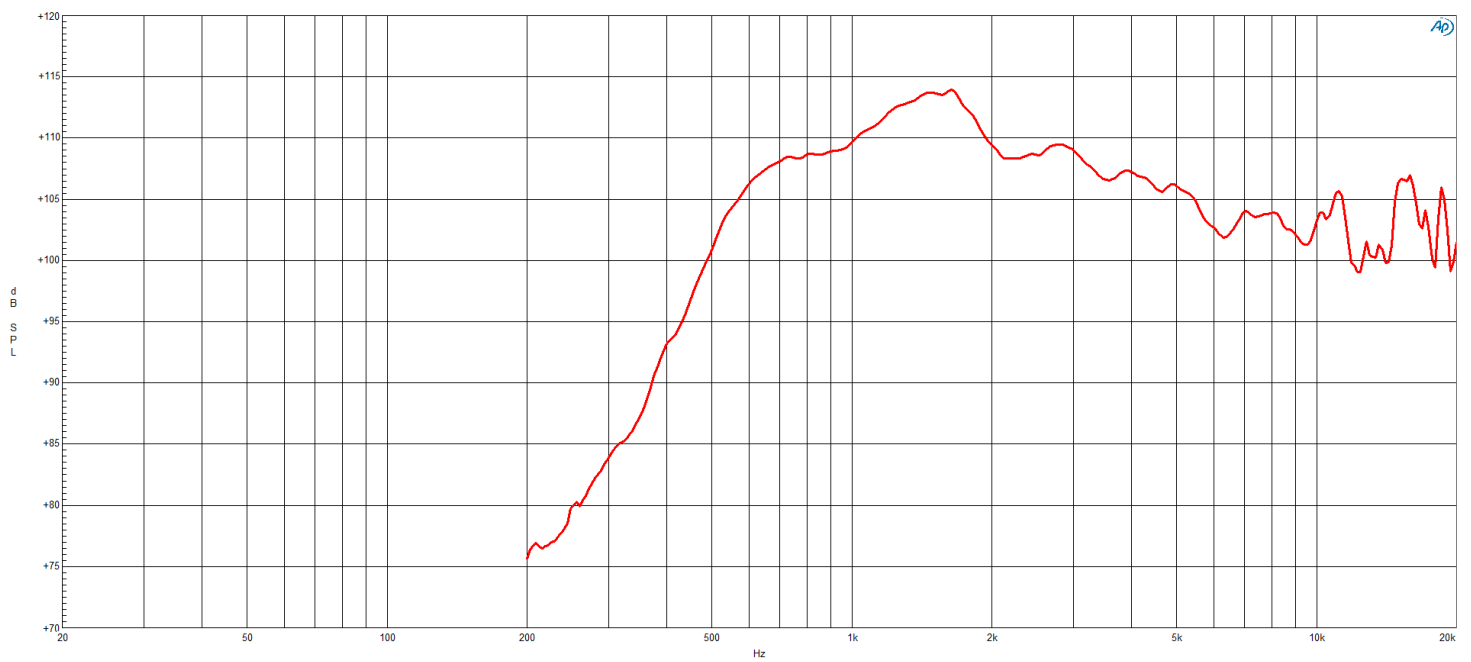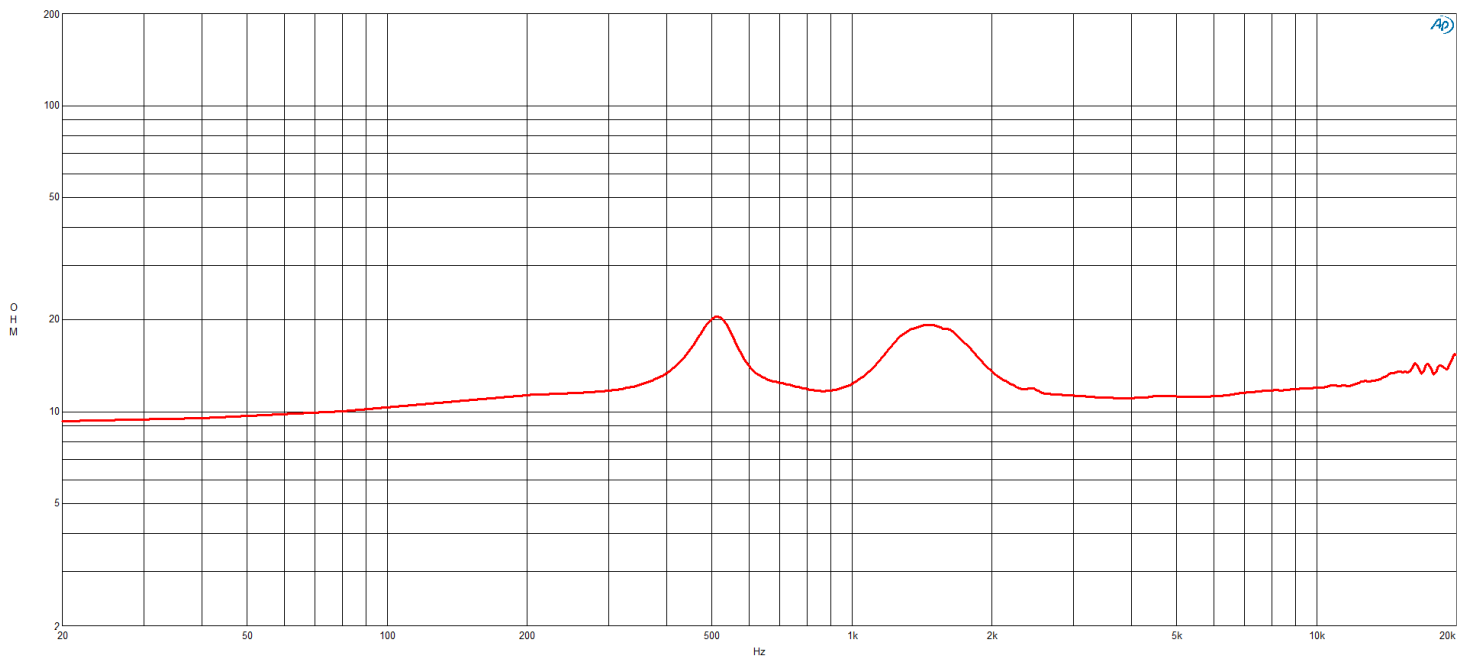

**DE60TN** 16 Ω

