



Key features:

- VERY HIGH EFFICIENCY MID-WOOFER
- LINEAR FREQUENCY RESPONSE, LOW HARMONIC DISTORTION
- LIGHTWEIGHT CARBON FIBER LOADED PAPER CONE, NOMEX SPIDER

Design notes:

The 121NPM is a ultra high efficiency, (100dB 1watt / 1 meter) 12-inch mid bass woofer with incredibly linear frequency response characteristics, extreme high power handling capability while generating low harmonic distortion artifacts.-

The 121NPM uses a lightweight carbon fiber loaded cone assembly along with a precision double roll constant geometry surround. This combination provides remarkable strength, high efficiency and a

excursion linearity of 14.2mm.

Magnetic Circuit
REDCATT engineers have developed a lightweight, neodymium outside ring based magnetic circuit capable of delivering the highest level of performance providing a consistent, high integrity magnetic flux gap, ultra low distortion characteristic and high efficiency cooling system. The magnetic circuit design is optimized to generate the

minimum amount of flux modulation, providing exceptional stability.

Specifications:

General specs

Nominal Diameter: 12"

Rated Impedance: 8 ohm

Power handling

AES Power: 450 watts

Program Power: 900 watts

Peak Power: 1800 watts

Voice Coil

Diameter: 3 in.

Winding wire: CCAW

Former: Glass Fiber

Winding height: 13 mm

T/S Parameters

Resonant frequency: 50 Hz

Re: 6.0 ohm

Qes: 0.16

Qms: 7.51

Qts: 0.16

Vas: 59.2 liters

Sd: 531 cm²

Sensitivity: 100 dB

Mms: 66.7 grams

Bl: 27.8

Le: 0.51 mH

Design details

Surround Material: Fabric

Cone material: Paper

Spider: Nomex

Plate thickness: 10 mm

Peak to peak linear cone displacement: 14.2 mm

Overall diameter: 315 mm

Bolt circle diameter: 298 mm

Baffle cutout dia.: 285 mm

Number of mounting holes: 8

Depth (flange to rear): 123.5 mm

Net weight: 4kg

Ordering codes:


121NPM-X8 ohm-079

Recone kits:

RC121NPMX-079

In many cases REDCATT produces 4 ohms, 8 ohms and 16 ohms versions. Indicate what impedance do you need in your request.

Frequency response & Impedance

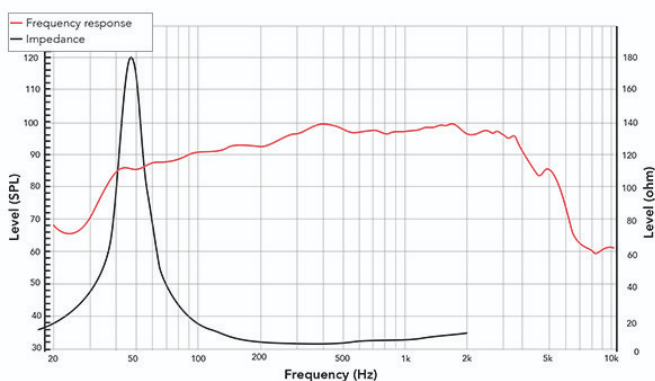

Frequency response measured on IAC baffle

2D drawing

