

DE254TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	60 W
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	120 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	106.5 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	1 kHz - 19 kHz
Recommended Crossover	1.5 kHz
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	44 mm (1.7 in)
Winding Material	Aluminium
Inductance	0.11 mH
Flux Density	1.85 T
Diaphragm Material	Titanium

- 120 W continuous program power capacity
- 1.4" horn throat diameter
- 44 mm (1.7 in) aluminium voice coil
- Titanium diaphragm
- 1000 - 19000 Hz response
- 106.5 dB sensitivity

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	120 mm (4.7 in)
Depth	85 mm (3.3 in)
Net Weight	2.4 kg (5.3 lb)
Shipping Units	1 pcs
Shipping Weight	2.44 kg (5.39 lb)
Shipping Box	135x135x93 mm (5.31x5.31x3.66 in)

SERVICE KITS

HF replacement-diaphragm	MMD5028M
--------------------------	-----------------



DE254TN 8 Ω

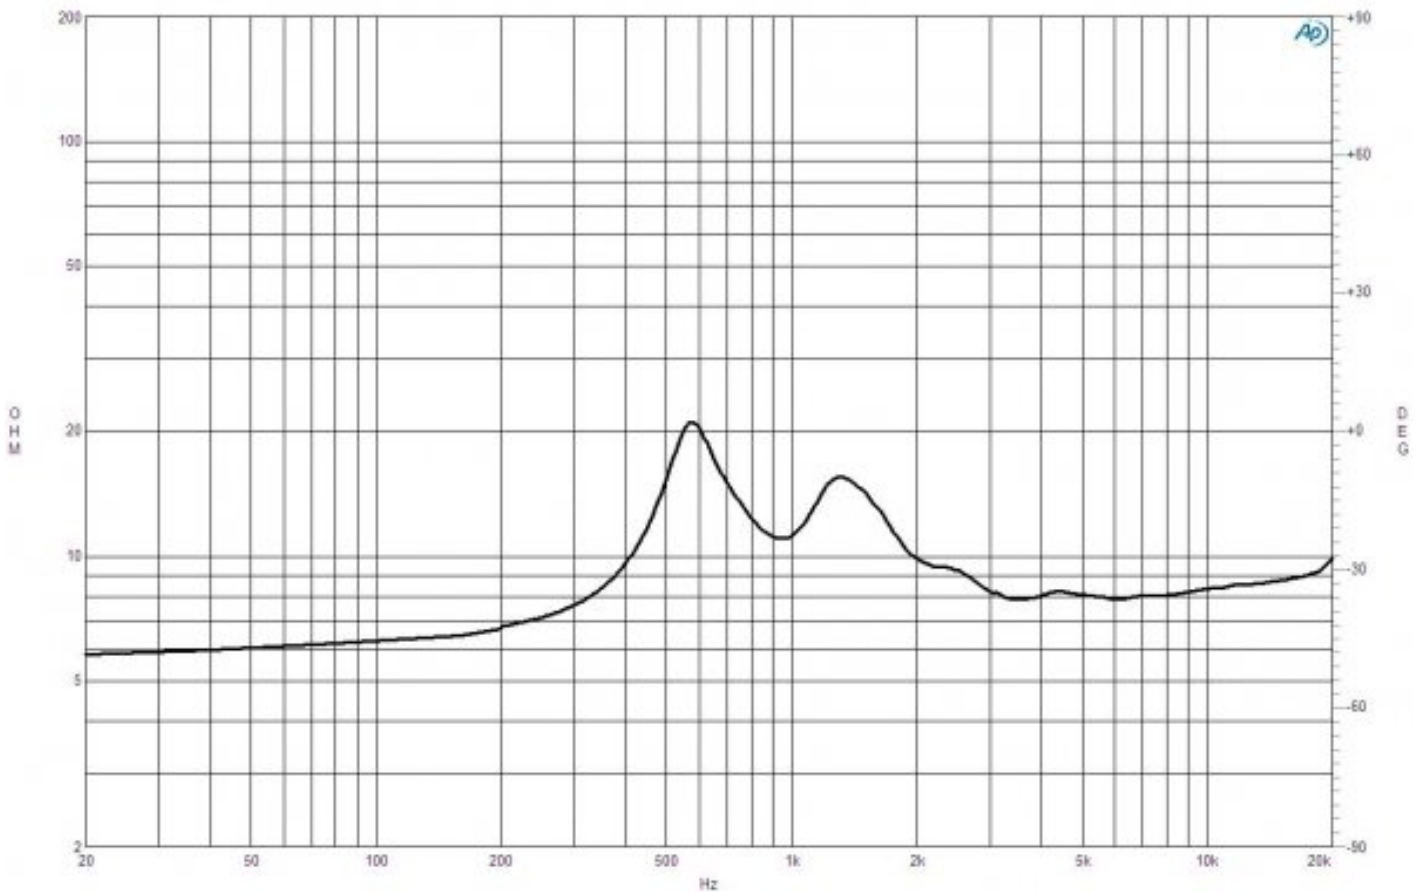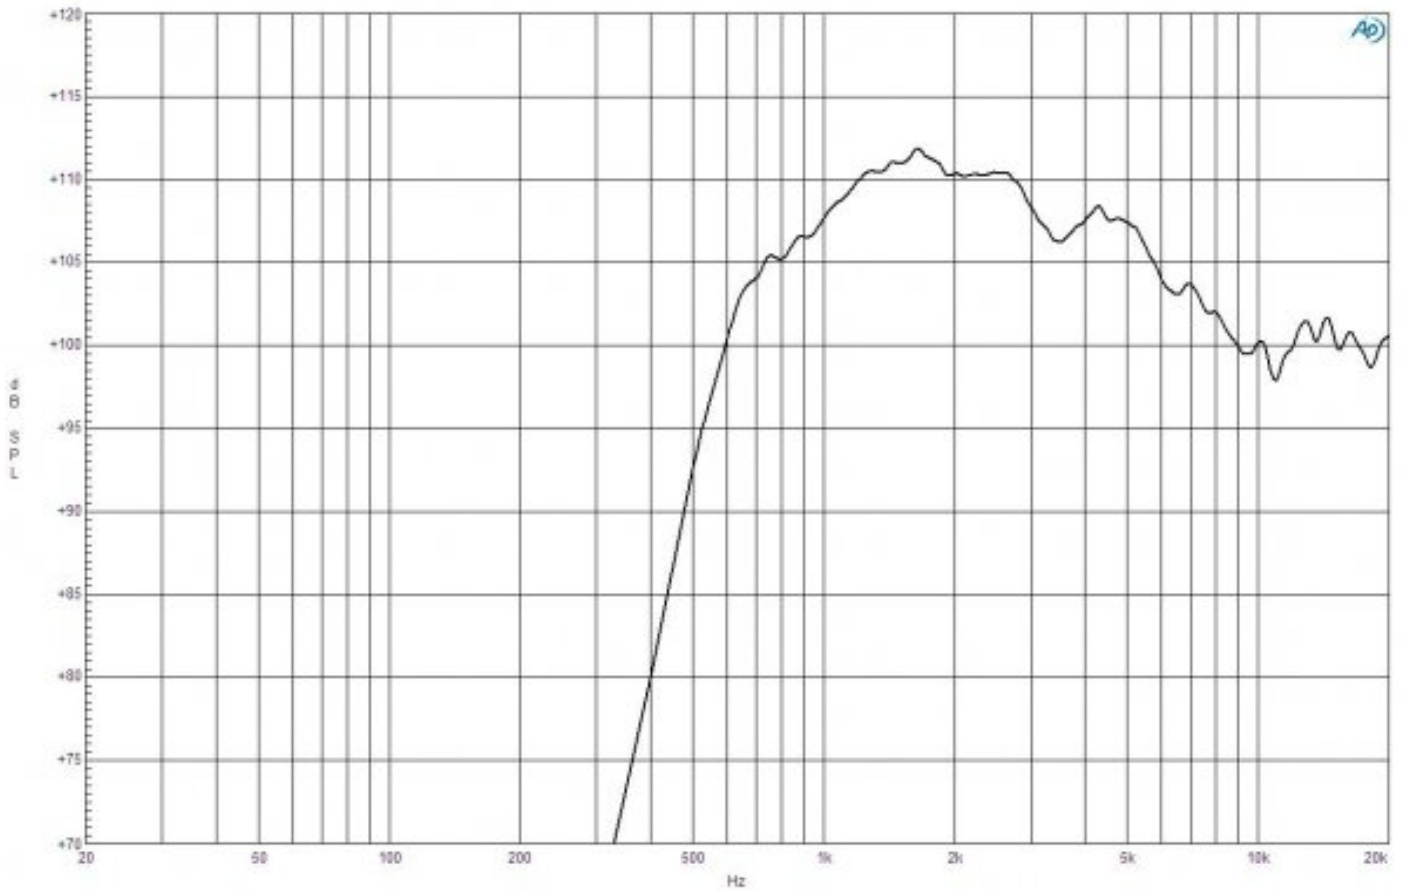

DE254TN 8 Ω

