

DE750TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 75 horn.

Throat Diameter	50 mm (2 in)
Nominal Impedance	8 Ω
Minimum Impedance	7.8 Ω
Nominal Power Handling	110 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	220 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	107.5 dB
<small>Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.</small>	
Frequency Range	0.5 kHz - 18 kHz
Recommended Crossover	0.8 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	1.9 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	180 mm (7.1 in)
Depth	87 mm (3.4 in)
Net Weight	6.1 kg (13.45 lb)
Shipping Units	1 pcs
Shipping Weight	6.36 kg (14.02 lb)
Shipping Box	190x190x120 mm (7.48x7.48x4.72 in)



SERVICE KITS

HF replacement-diaphragm	MMD3ATN8
--------------------------	-----------------

- 220 W continuous program power capacity
- 2" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 107.5 dB sensitivity
- Shorting copper cap for extended HF response



DE750TN 8 Ω

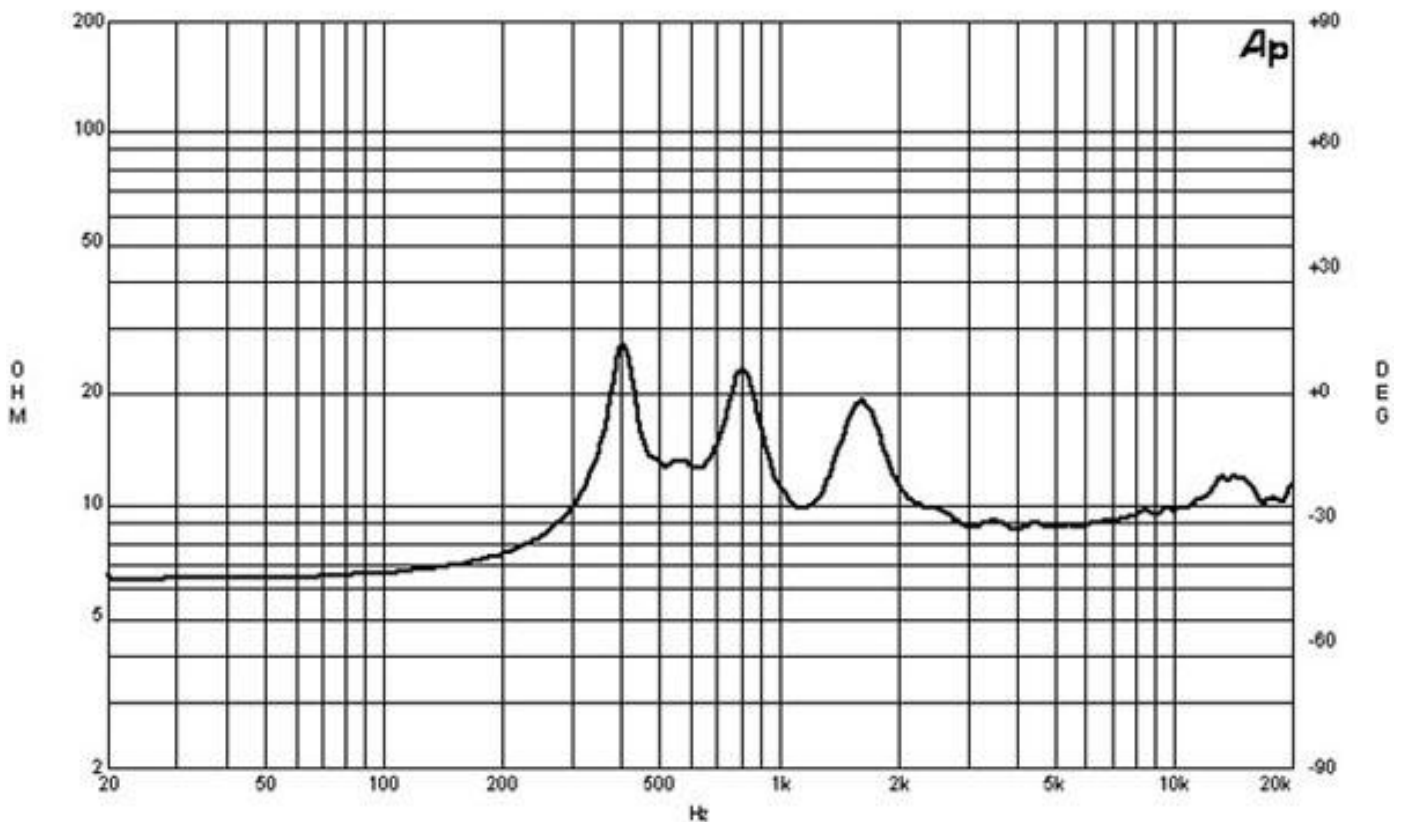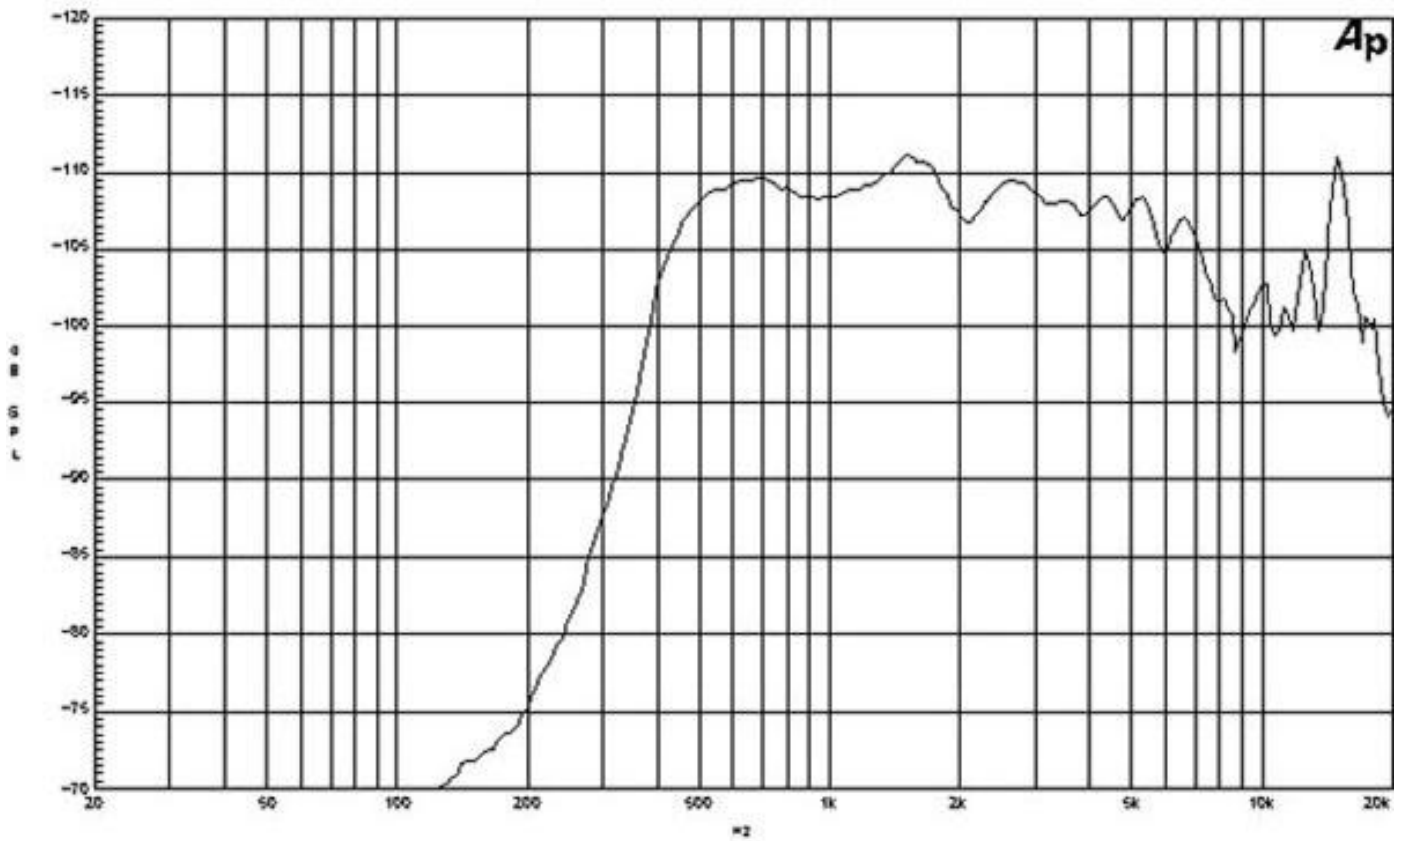

DE750TN 8 Ω

