

**12NDL88** 8 Ω**Woofer**

- 1400 W continuous program power capacity
- 88 mm (3.5 in) aluminium voice coil
- 50 - 3000 Hz response
- 98 dB sensitivity
- Aluminium demodulating ring allows a very low distortion figure
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression

The NDL88 series is perfectly balanced for the loudspeaker systems of today. Incorporating a high temperature neodymium magnet inside the 3.5" (88mm) voice coil reduces the amount of steel needed in the motor structure, saving cost and weight. Unexpected low frequency output and midrange extension to meet with almost any driver for two way applications is the hallmark of this new performance-oriented woofer line from B&C Speakers. Do more, with less, with the NDL88 series.



# 12NDL88 8 Ω

# Woofer

## SPECIFICATIONS

|                                                                                                                                                     |                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Nominal Diameter                                                                                                                                    | <b>320 mm (12 in)</b>           |
| Nominal Impedance                                                                                                                                   | <b>8 Ω</b>                      |
| Minimum Impedance                                                                                                                                   | <b>6 Ω</b>                      |
| Nominal Power Handling                                                                                                                              | <b>700 W</b>                    |
| 2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air. |                                 |
| Continuous Power Handling                                                                                                                           | <b>1400 W</b>                   |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating.                                                                     |                                 |
| Sensitivity                                                                                                                                         | <b>98 dB</b>                    |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.                                                                                  |                                 |
| Frequency Range                                                                                                                                     | <b>50 Hz - 3000 Hz</b>          |
| Voice Coil Diameter                                                                                                                                 | <b>88 mm (3.5 in)</b>           |
| Winding Material                                                                                                                                    | <b>Aluminium</b>                |
| Former Material                                                                                                                                     | <b>Glass Fibre</b>              |
| Winding Depth                                                                                                                                       | <b>21 mm (0.85 in)</b>          |
| Magnetic Gap Depth                                                                                                                                  | <b>10 mm (0.4 in)</b>           |
| Flux Density                                                                                                                                        | <b>1.05 T</b>                   |
| Woofer Cone Treatment                                                                                                                               | <b>WP Waterproof Front Side</b> |

## PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

|                  |                                                 |
|------------------|-------------------------------------------------|
| Fs               | <b>51 Hz</b>                                    |
| Re               | <b>5 Ω</b>                                      |
| Qes              | <b>0.29</b>                                     |
| Qms              | <b>5</b>                                        |
| Qts              | <b>0.27</b>                                     |
| Vas              | <b>52 dm<sup>3</sup> (1.84 ft<sup>3</sup>)</b>  |
| Sd               | <b>522 cm<sup>2</sup> (80.9 in<sup>2</sup>)</b> |
| η <sub>0</sub>   | <b>2.3 %</b>                                    |
| X <sub>max</sub> | <b>8 mm</b>                                     |
| X <sub>var</sub> | <b>9.5 mm</b>                                   |
| M <sub>ms</sub>  | <b>71 g</b>                                     |
| Bl               | <b>19.9 Tm</b>                                  |
| Le               | <b>1.3 mH</b>                                   |
| EBP              | <b>176 Hz</b>                                   |

## DESIGN



|                       |                                                |
|-----------------------|------------------------------------------------|
| Surround Shape        | <b>Triple Roll</b>                             |
| Cone Shape            | <b>Exponential</b>                             |
| Magnet Material       | <b>Neodymium Inside Slug</b>                   |
| Spider                | <b>Double Silicone</b>                         |
| Pole Design           | <b>T-Pole</b>                                  |
| Woofer Cone Treatment | <b>WP Waterproof Front Side</b>                |
| Recommended Enclosure | <b>40 dm<sup>3</sup> (1.41 ft<sup>3</sup>)</b> |
| Recommended Tuning    | <b>65 Hz</b>                                   |


## MOUNTING AND SHIPPING INFO

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| Overall Diameter              | <b>315 mm (12.4 in)</b>                         |
| Bolt Circle Diameter          | <b>298 mm (11.73 in)</b>                        |
| Baffle Cutout Diameter        | <b>282 mm (11.1 in)</b>                         |
| Depth                         | <b>140 mm (5.51 in)</b>                         |
| Flange and Gasket Thickness   | <b>13 mm (0.51 in)</b>                          |
| Air Volume Occupied by Driver | <b>2.5 dm<sup>3</sup> (0.08 ft<sup>3</sup>)</b> |
| Net Weight                    | <b>4.95 kg (10.91 lb)</b>                       |
| Shipping Units                | <b>1 pcs</b>                                    |
| Shipping Weight               | <b>5.85 kg (12.9 lb)</b>                        |
| Shipping Box                  | <b>360x360x200 mm (14.17x14.17x7.87 in)</b>     |

## SERVICE KITS

|                |                    |
|----------------|--------------------|
| LF recone-kits | <b>RCK12NDL888</b> |
|----------------|--------------------|

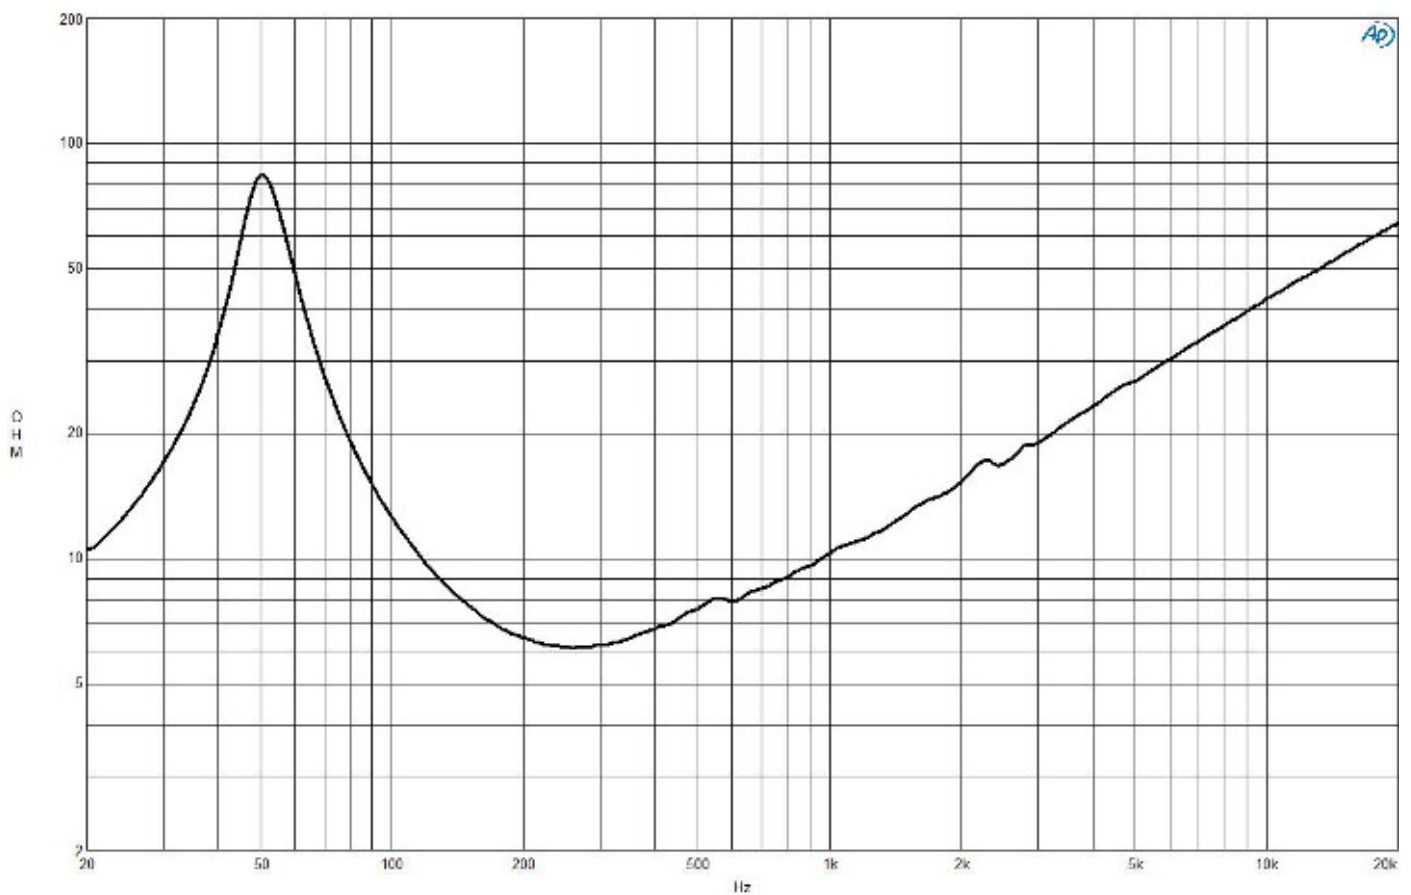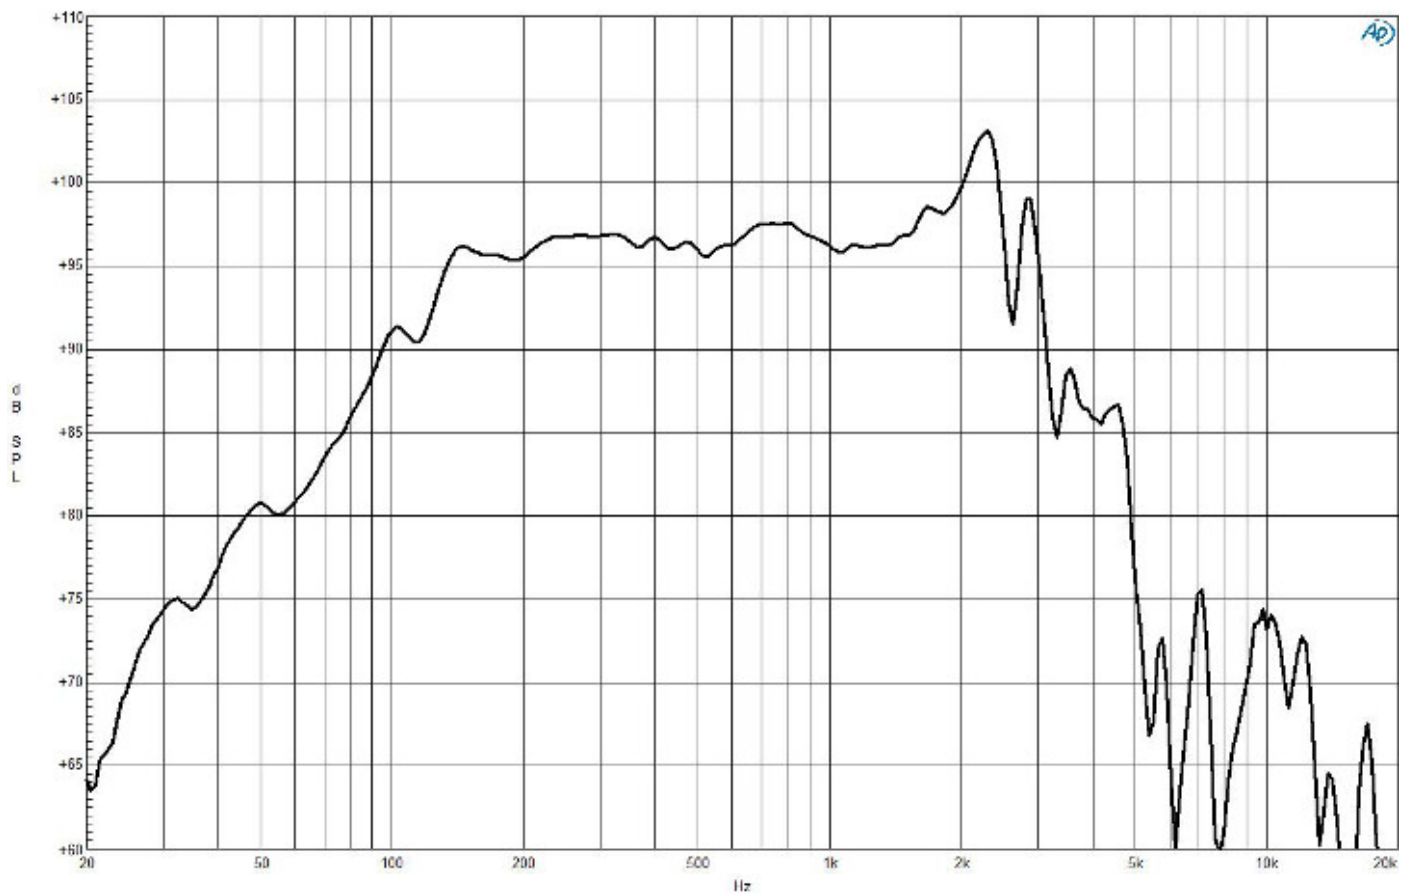

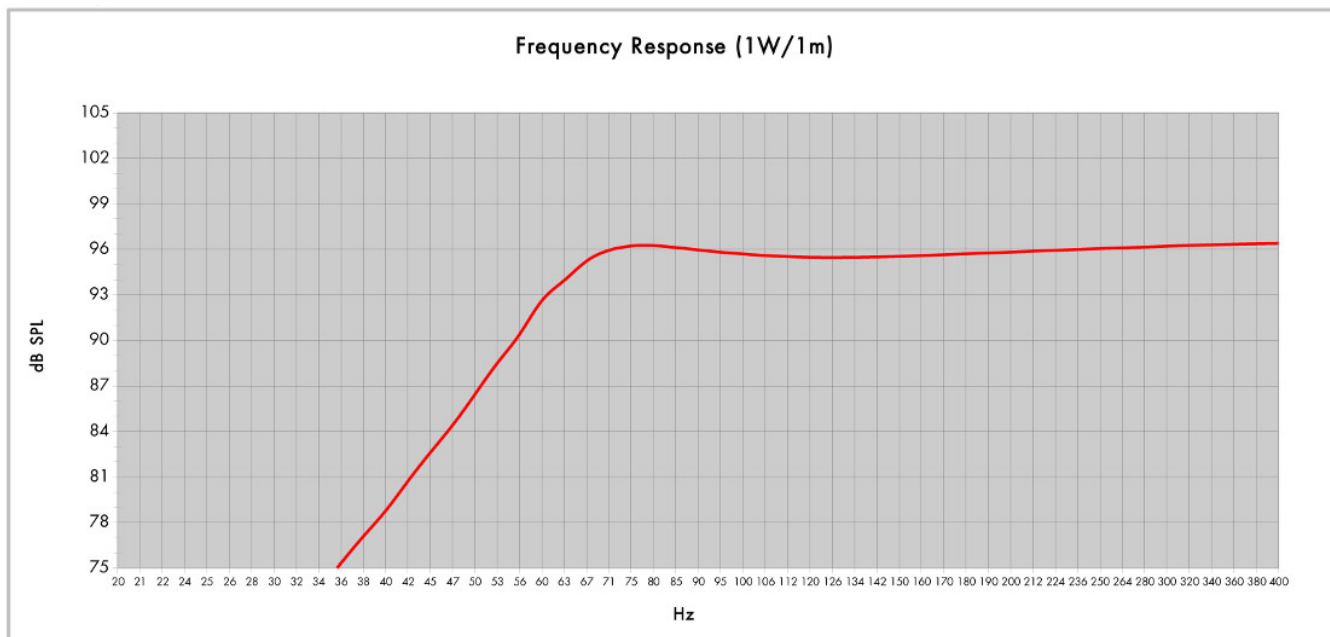

|                               |                    |                   |                   |
|-------------------------------|--------------------|-------------------|-------------------|
| Model:                        | <b>12NDL88</b>     | Configuration:    | <b>One Driver</b> |
| Enclosure Type:               | <b>Bass Reflex</b> |                   |                   |
| Internal Net Volume (Litres): | <b>40</b>          | QB:               | <b>6</b>          |
| Tuning Frequency (Hz):        | <b>65</b>          | Port Area (cm²):  | <b>144,7</b>      |
| Frequency (-3 dB) (Hz):       | <b>62,4</b>        | Port Length (cm): | <b>13,9</b>       |
| Frequency (-10 dB) (Hz):      | <b>50,4</b>        |                   |                   |

**12NDL88** 8 Ω

Woofer

