

DE991TN 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	36 mm (1.4 in)
Nominal Impedance	16 Ω
Minimum Impedance	16 Ω
Nominal Power Handling	100 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	200 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108 dB
<small>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.</small>	
Frequency Range	0.8 kHz - 17 kHz
Recommended Crossover	1 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	86 mm (3.4 in)
Winding Material	Aluminium
Inductance	0.11 mH
Flux Density	1.94 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	115 mm (4.53 in)
Depth	63 mm (2.48 in)
Net Weight	2 kg (4.41 lb)



SERVICE KITS

HF replacement-diaphragm	MMD35FTN16M
--------------------------	--------------------

- 200 W continuous program power capacity
- 1.4" horn throat diameter
- 86 mm (3.4 in) aluminium voice coil
- Titanium diaphragm
- 800 - 17000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap



DE991TN 16 Ω

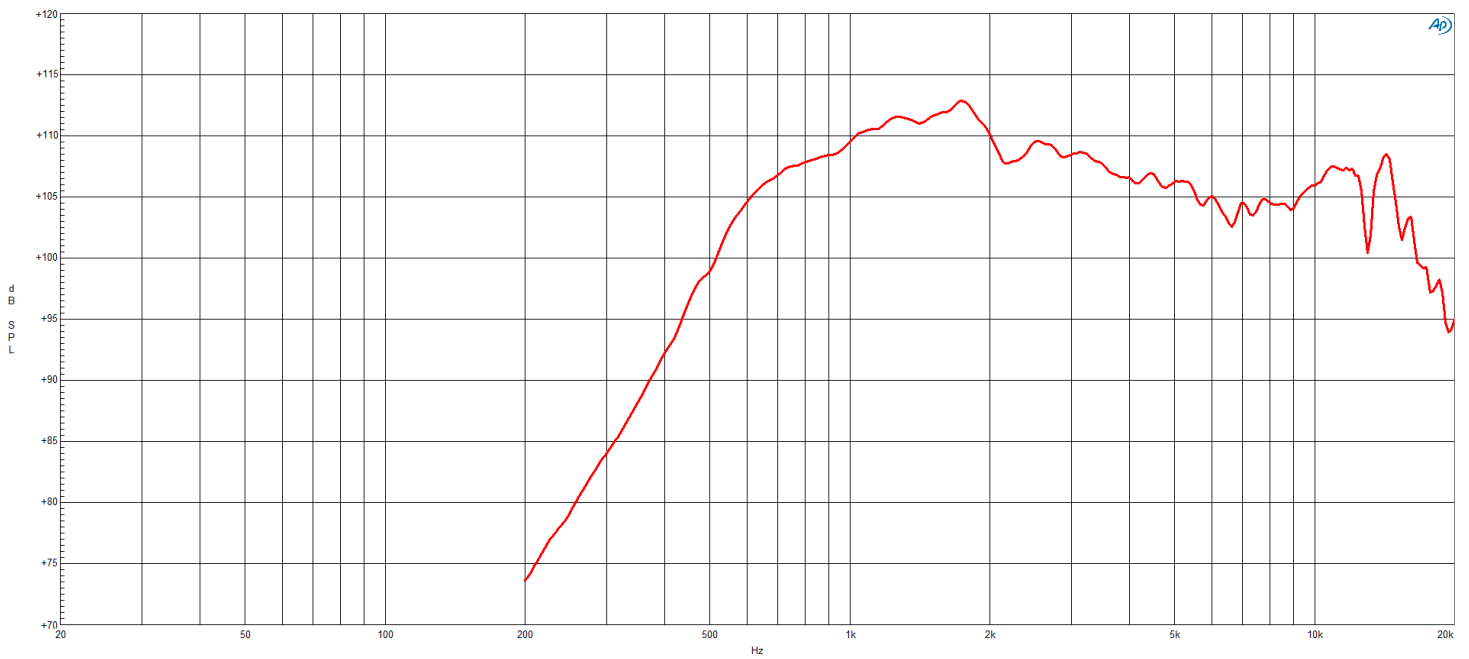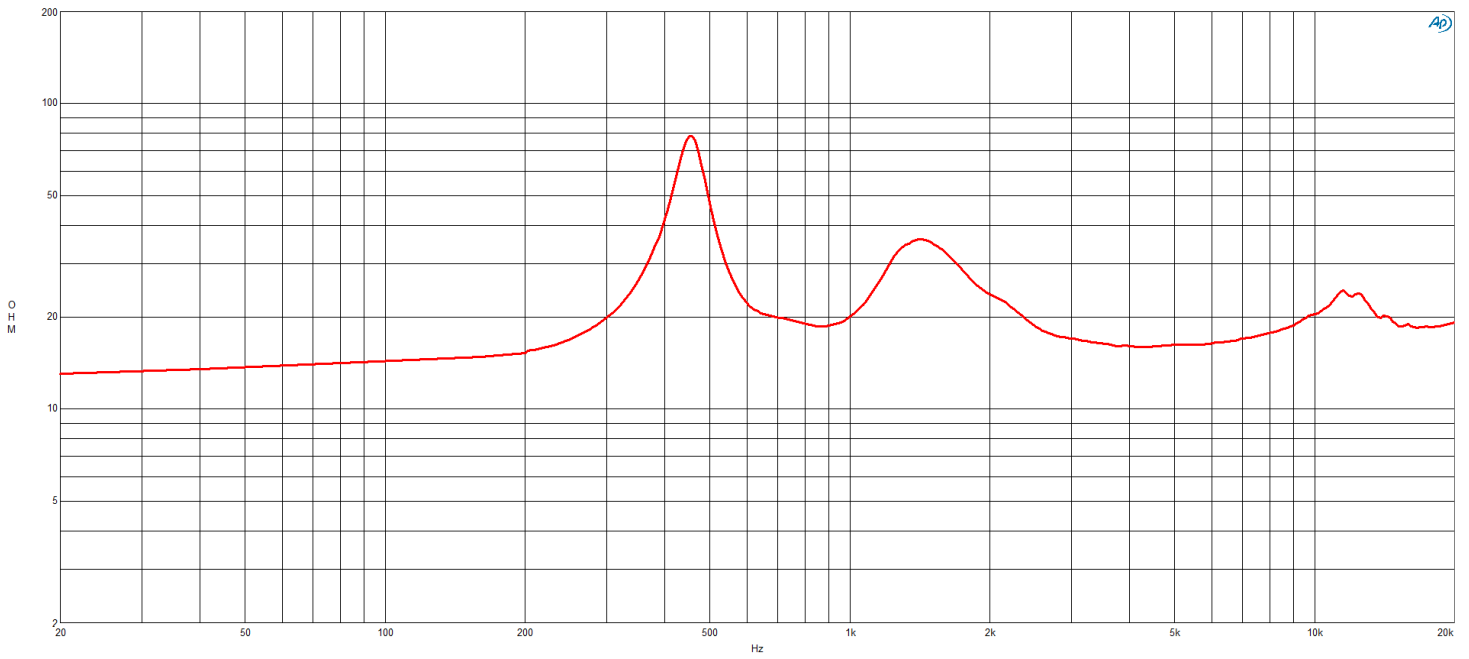

DE991TN 16 Ω

