

12NW100 4 Ω

Subwoofer

- 2000 W continuous program power capacity
- 100 mm (4 in) copper voice coil
- 45 - 1500 Hz response
- 92 dB sensitivity
- Excursion optimized lead wires (woven through spider)
- FEA optimized Neodymium magnet assembly
- Double silicone spider with optimized compliance
- Ventilated voice coil gap for reduced power compression



12NW100 4 Ω

Subwoofer

SPECIFICATIONS

Nominal Diameter	320 mm (12 in)
Nominal Impedance	4 Ω
Minimum Impedance	5 Ω
Nominal Power Handling	1000 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	2000 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	92 dB
Applied RMS Voltage is set to 2V for 4 ohms Nominal Impedance.	
Frequency Range	45 Hz - 1500 Hz
Voice Coil Diameter	100 mm (4 in)
Winding Material	Copper
Former Material	Glass Fibre
Winding Depth	25 mm (1 in)
Magnetic Gap Depth	12 mm (0.5 in)
Flux Density	1.2 T
Woofer Cone Treatment	TWP Waterproof Both Sides

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	44 Hz
Re	3.8 Ω
Qes	0.21
Qms	5.8
Qts	0.2
Vas	43.3 dm³ (1.53 ft³)
Sd	531 cm² (82.3 in²)
η ₀	1.69 %
X _{max}	9 mm
X _{var}	10 mm
M _{ms}	120 g
Bl	24.38 Tm
Le	1.79 mH
EBP	210 Hz

DESIGN

Surround Shape	Triple Roll
Cone Shape	Radial
Magnet Material	Neodymium Inside Slug
Spider	Double Silicone
Pole Design	T-Pole
Woofer Cone Treatment	TWP Waterproof Both Sides
Recommended Enclosure	50 dm³ (1.77 ft³)
Recommended Tuning	50 Hz

MOUNTING AND SHIPPING INFO



Overall Diameter	319 mm (12.5 in)
Bolt Circle Diameter	299 mm (11.8 in)
Baffle Cutout Diameter	281 mm (11.1 in)
Depth	137 mm (5.4 in)
Flange and Gasket Thickness	13 mm (0.5 in)
Air Volume Occupied by Driver	2.7 dm³ (0.09 ft³)
Net Weight	8.2 kg (18 lb)
Shipping Units	1 pcs
Shipping Weight	9.1 kg (20.06 lb)
Shipping Box	360x360x200 mm (14.17x14.17x7.87 in)

SERVICE KITS

LF recone-kits	RCK12NW1004
----------------	--------------------


12NW100 4 Ω

Subwoofer

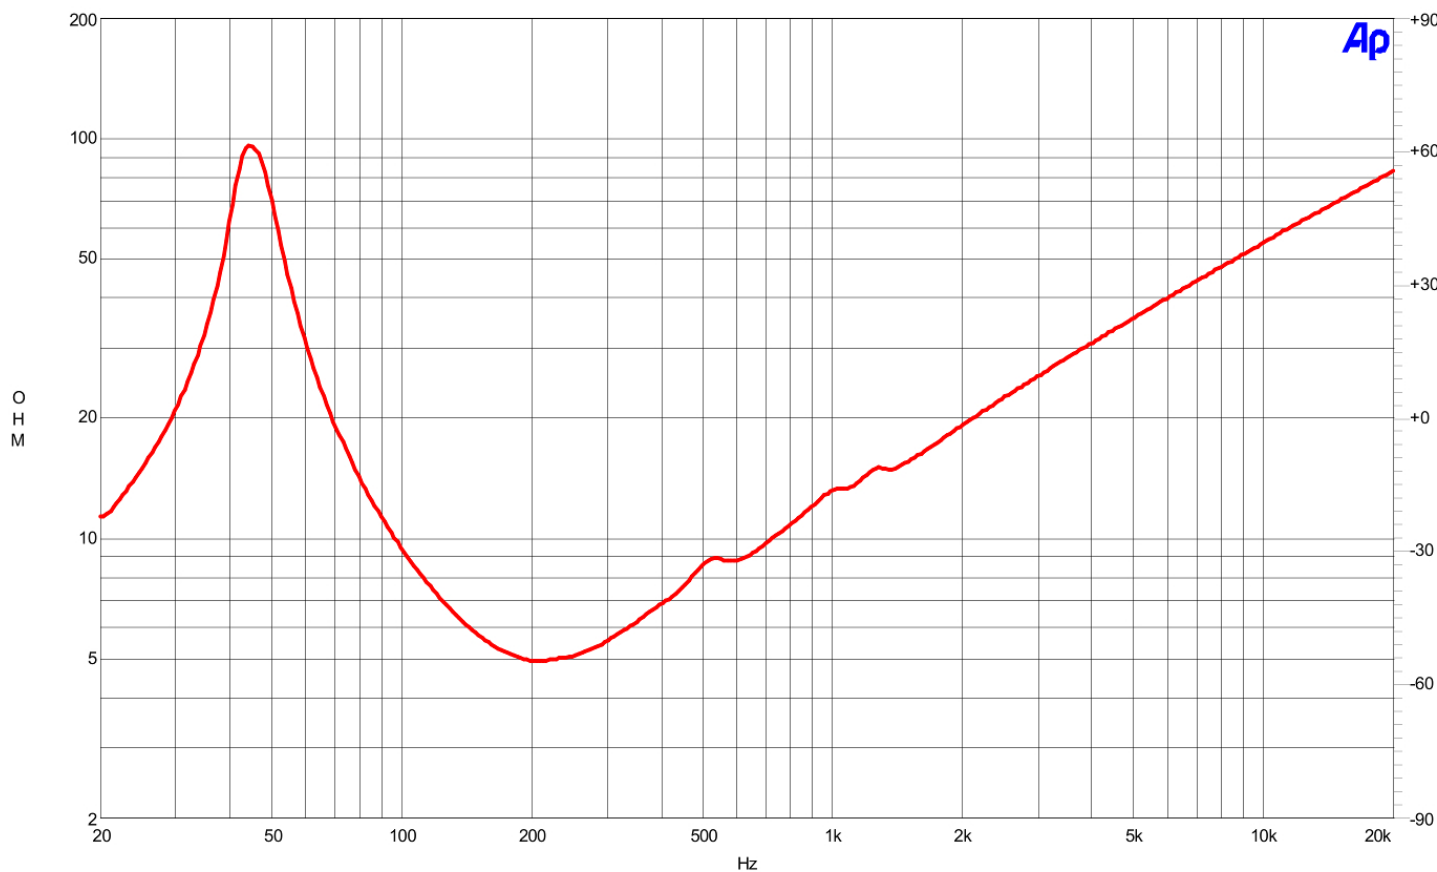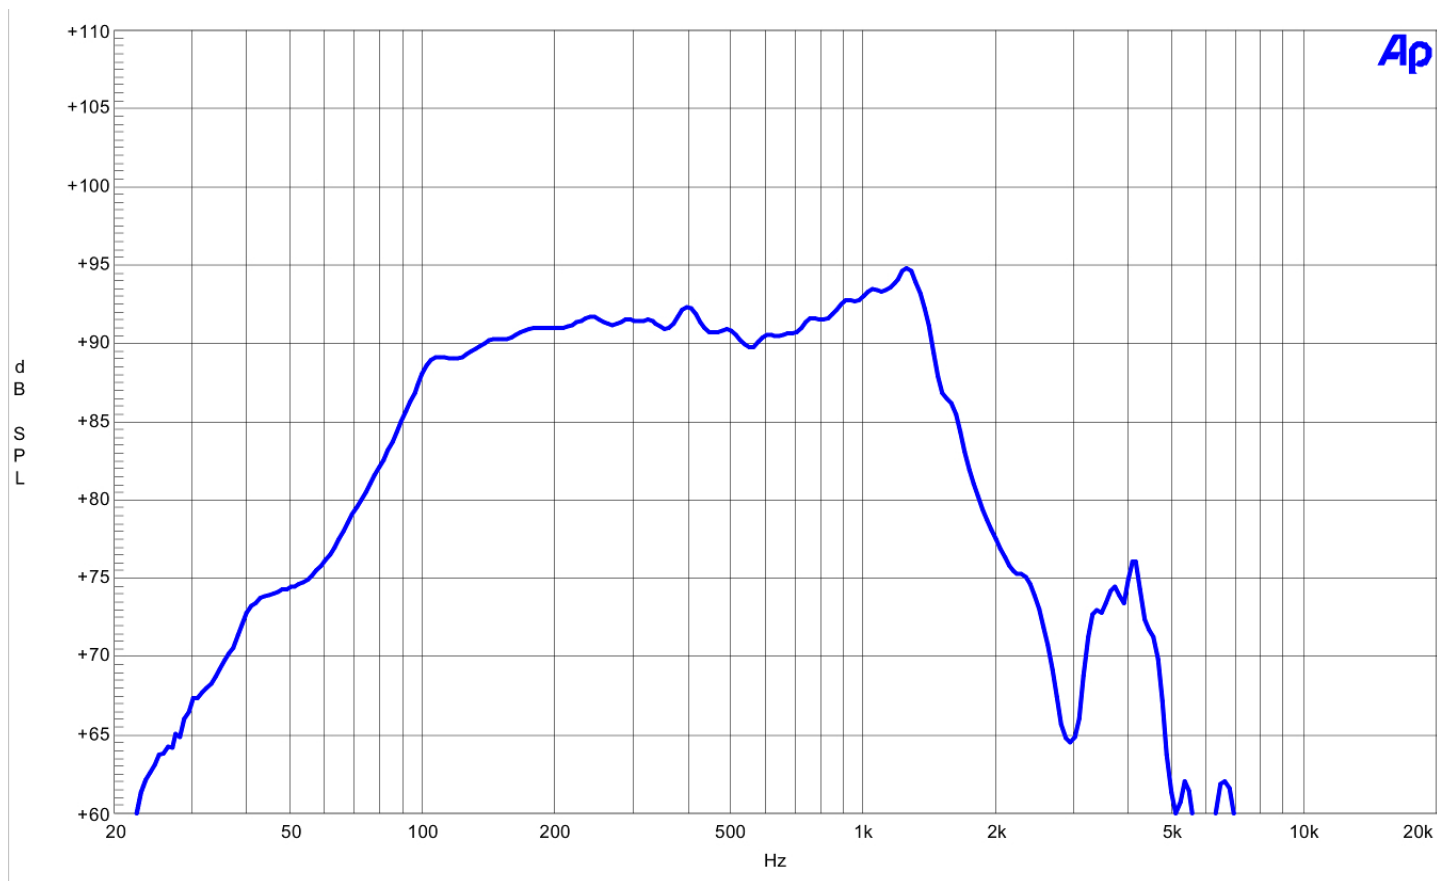

12NW100 4 Ω

Subwoofer

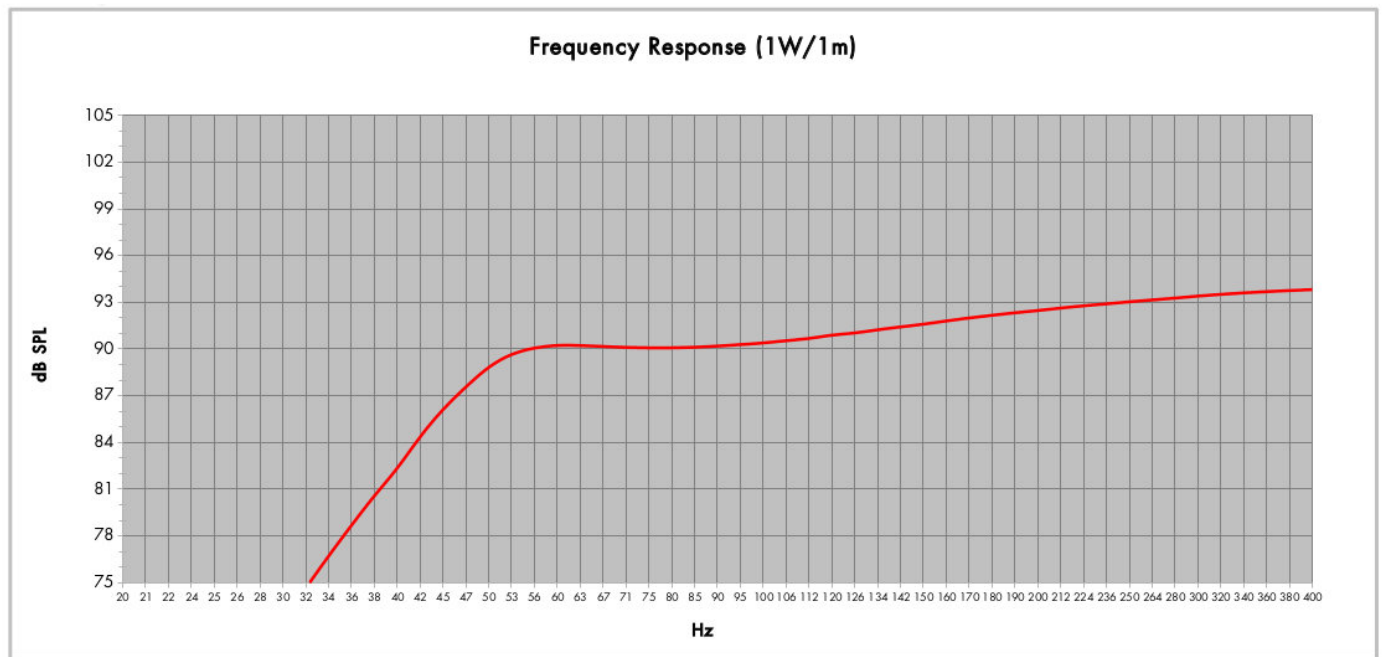

Model:	12NW100	
Enclosure Type:	Bass Reflex	Configuration: One Driver
Internal Net Volume (Litres):	50	QB: 3
Tuning Frequency (Hz):	50	Port Area (cm²): 208,1
Frequency (-3 dB) (Hz):	143,8	Port Length (cm): 35,9