

## ME20

### SPECIFICATIONS

Horn mounted on B&C DE 500 compression driver.

Throat Diameter	<b>25 mm (1 in)</b>
Nominal Coverage Horizontal	<b>90°</b>
Nominal Coverage Vertical	<b>60°</b>
Cutoff Frequency	<b>1.5 kHz</b>
Material	<b>Cast Aluminium</b>
Dimensions	<b>145x145x90 mm (5.7x5.7x3.6 in)</b>

- 1" throat entry
- 90° x 60° nominal coverage
- Exponential flare
- Excellent loading down to 1.5 kHz


### MOUNTING AND SHIPPING INFO

Other details	<b>2x 6.3 mm (0.25 in) holes 180° on 76 mm (3 in) di- ameter --- 2x 5.1 mm (0.2 in) holes 180° on 57 mm (2.24 in) diameter</b>
Baffle Cutout Dimension	<b>118 mm (4.6 in)</b>
Air Volume Occupied by Driver	<b>0.1 dm<sup>3</sup></b>
Net Weight	<b>0.37 kg (0.81 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>0.38 kg (0.83 lb)</b>
Shipping Box	<b>165x165x100 mm (6.50x6.50x3.94 in)</b>




**ME20**



**ME20 horizontal directivity map**

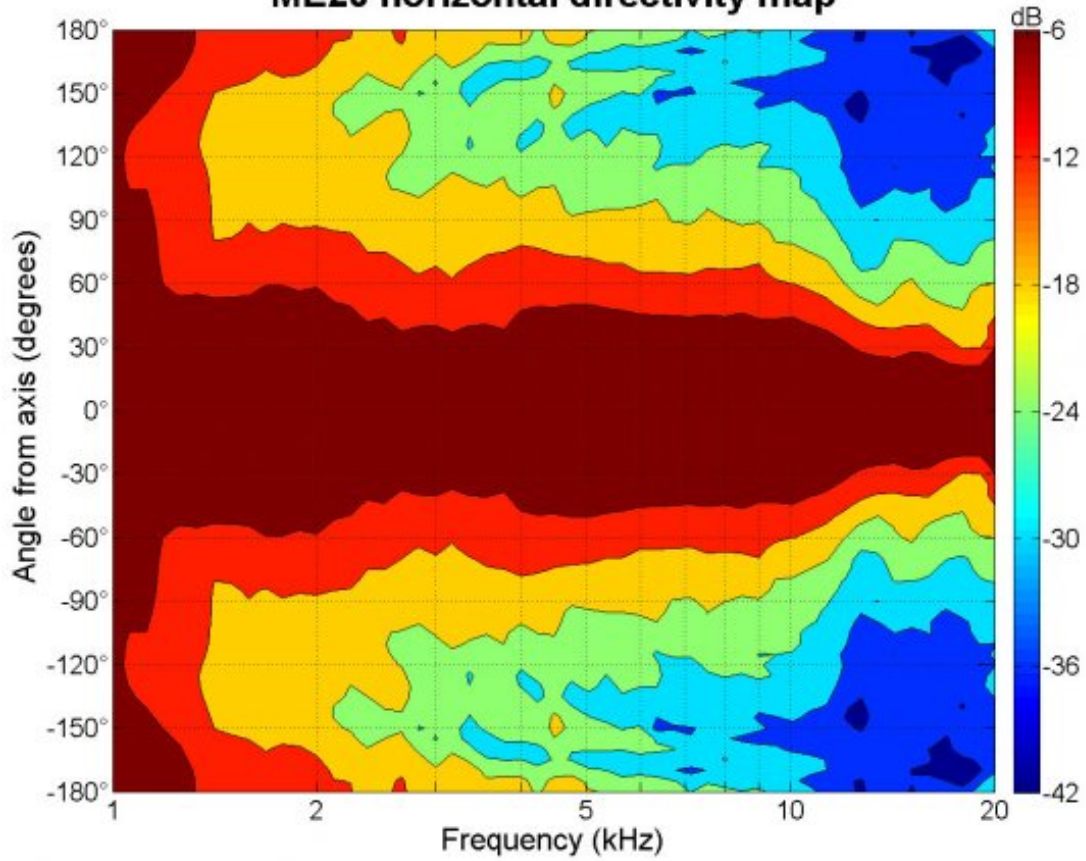

**ME20 vertical directivity map**

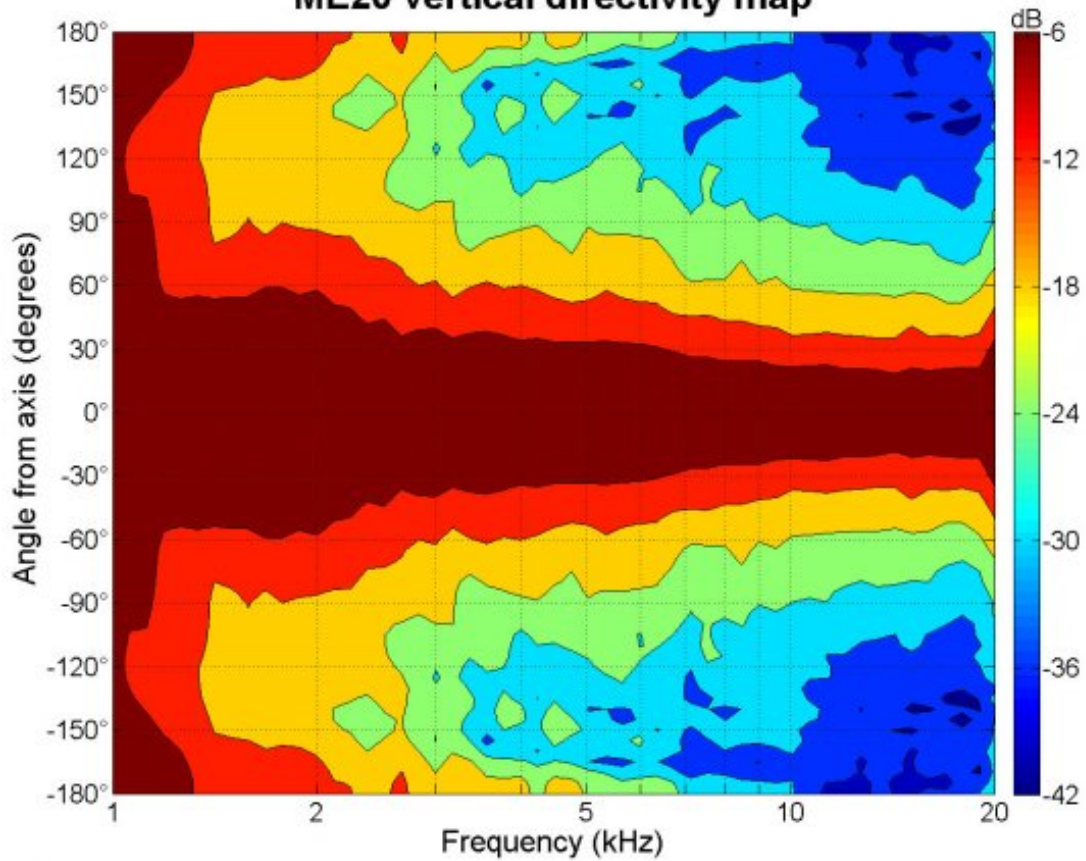

**ME20**

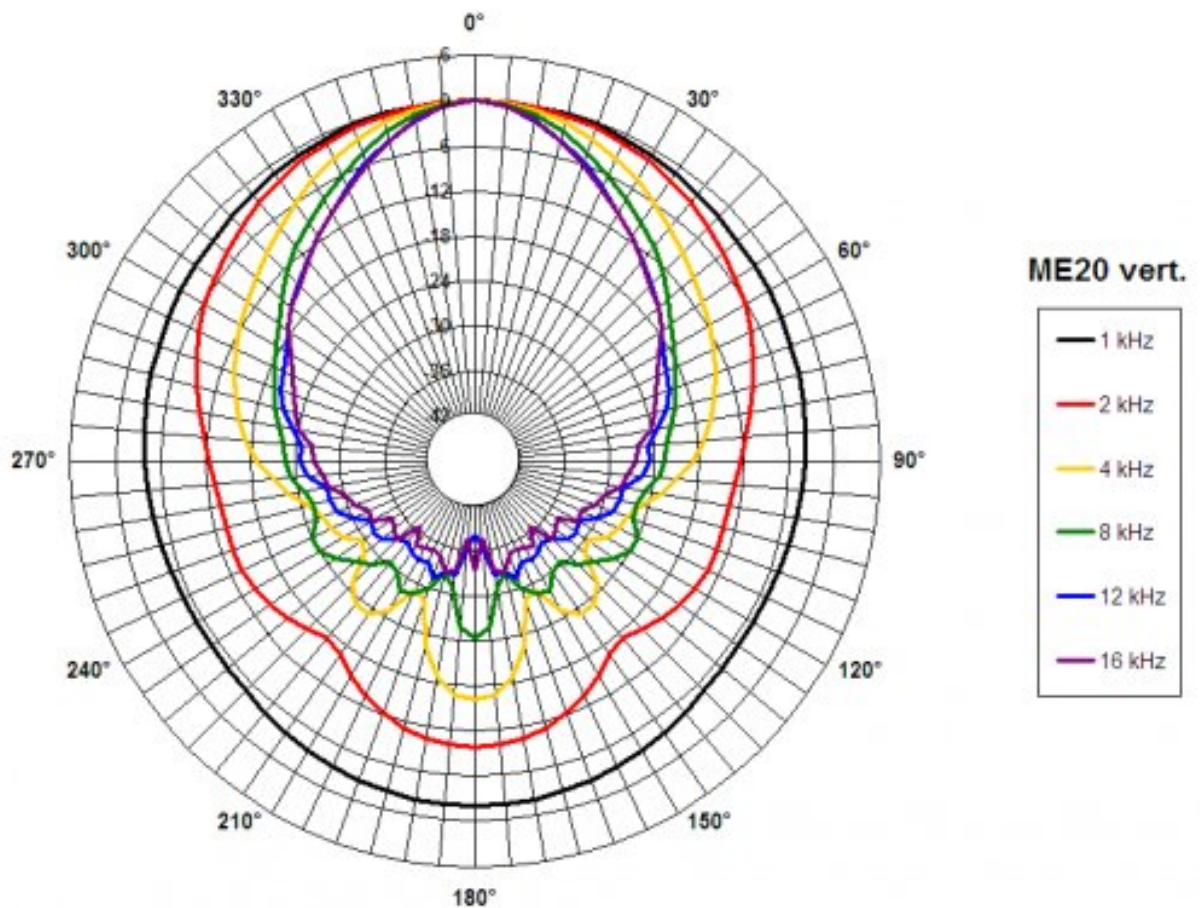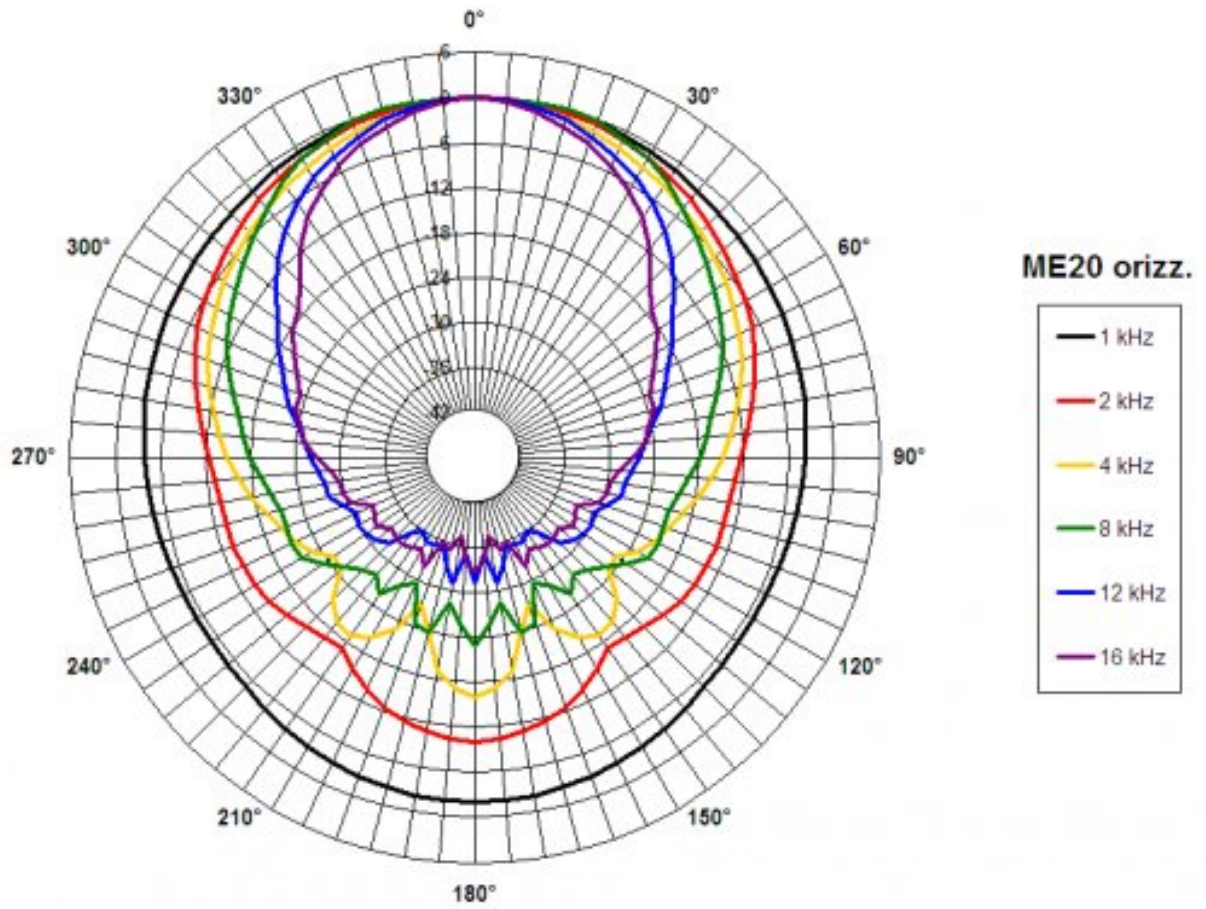

**ME20**

