

DE700TN 8 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

| | |
|--|-----------------------|
| Throat Diameter | 38 mm (1.5 in) |
| Nominal Impedance | 8 Ω |
| Minimum Impedance | 8.4 Ω |
| Nominal Power Handling | 110 W |
| 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. | |
| Continuous Power Handling | 220 W |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating. | |
| Sensitivity | 107.5 dB |
| Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance. | |
| Frequency Range | 1 kHz - 18 kHz |
| Recommended Crossover | 0.8 kHz |
| 12 dB/oct. or higher slope high-pass filter. | |
| Voice Coil Diameter | 75 mm (3 in) |
| Winding Material | Aluminium |
| Inductance | 0.14 mH |
| Flux Density | 1.9 T |
| Diaphragm Material | Titanium |

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

| | |
|------------------|---|
| Overall Diameter | 180 mm (7.1 in) |
| Depth | 70 mm (2.8 in) |
| Net Weight | 6 kg (13.2 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 6.18 kg (13.62 lb) |
| Shipping Box | 190x190x100 mm (7.48x7.48x3.94 in) |



SERVICE KITS

| | |
|--------------------------|-----------------|
| HF replacement-diaphragm | MMD3ATN8 |
|--------------------------|-----------------|

- 220 W continuous program power capacity
- 1.5" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 107.5 dB sensitivity
- Shorting copper cap for extended HF response



DE700TN 8 Ω

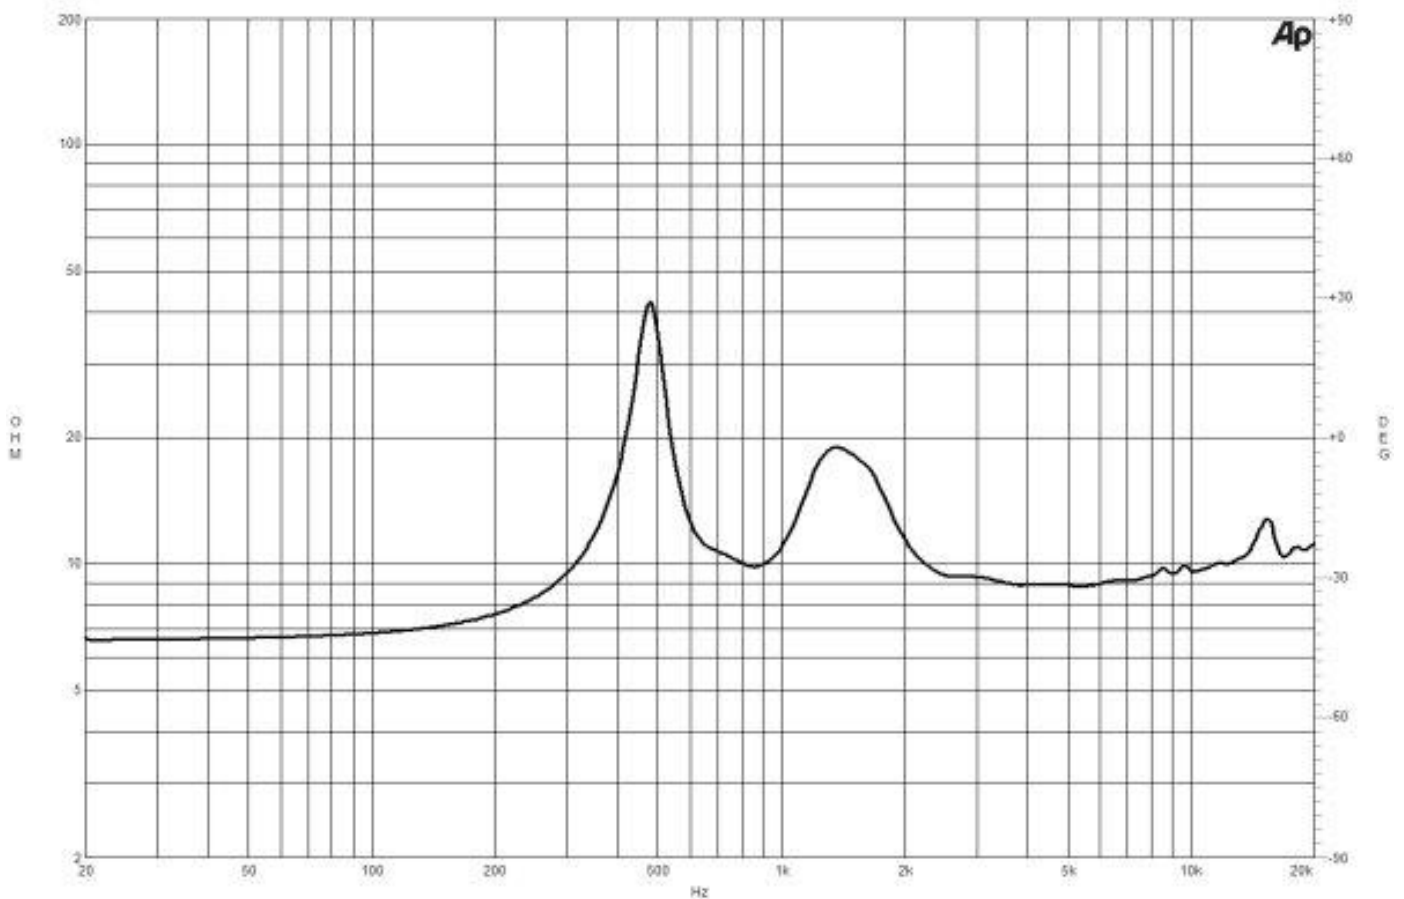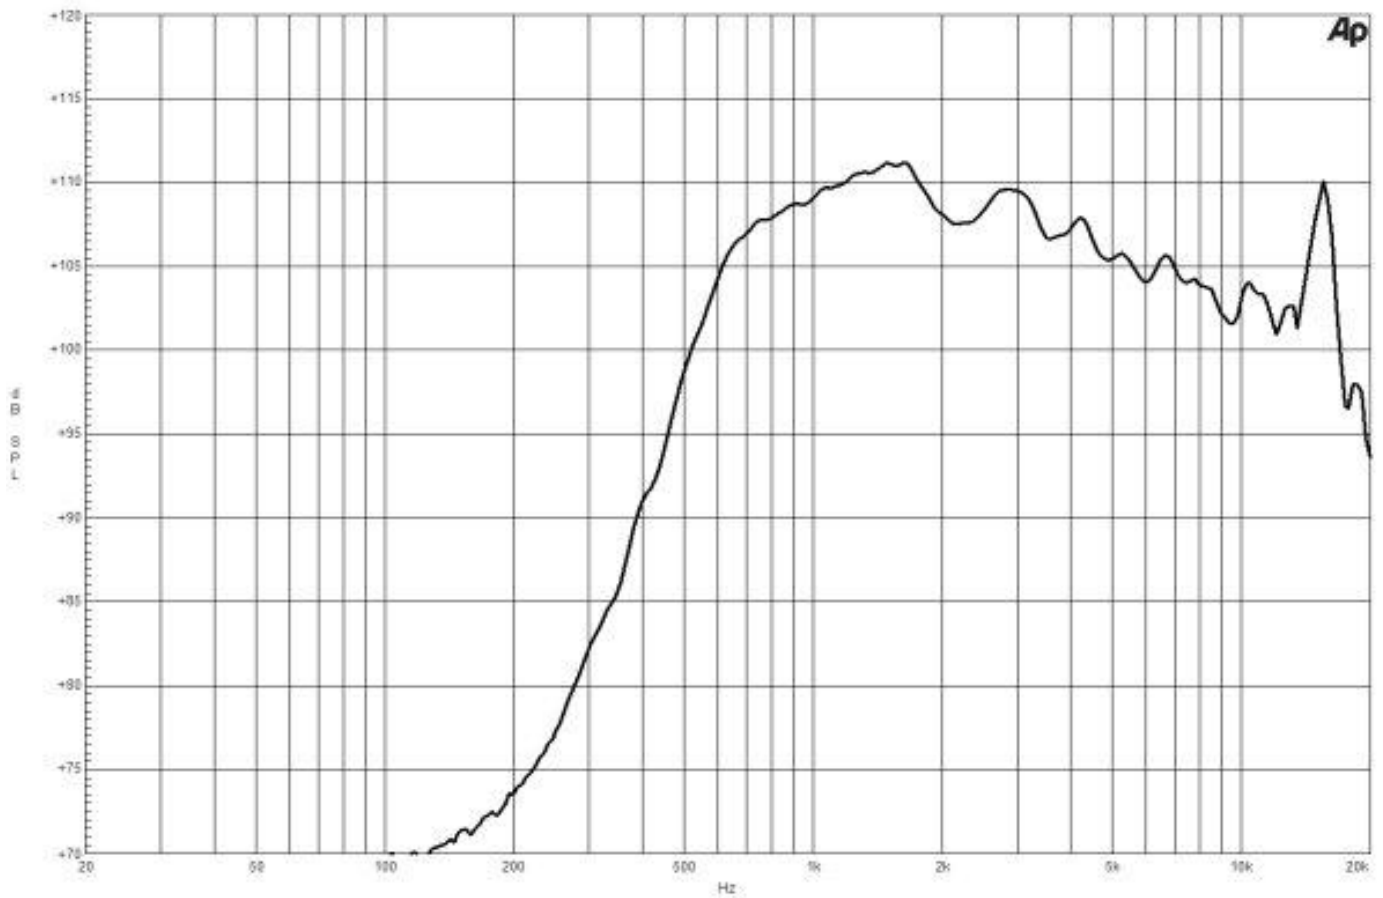

DE700TN 8 Ω

