


DF10.101LE

Lavoce

1" COMPRESSION DRIVER

FERRITE MAGNET


- 1 INCH CCAW VOICE COIL
- 106 dB/SPL SENSITIVITY
- 30 W PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR, PHASEPLUG AND DIAPHRAGM
- 1500 - 20000 Hz FREQUENCY RANGE
- HIGH TEMPERATURE POLYMER DIAPHRAGM AND SURROUND
- COMPACT SIZE 70 mm DIAMETER

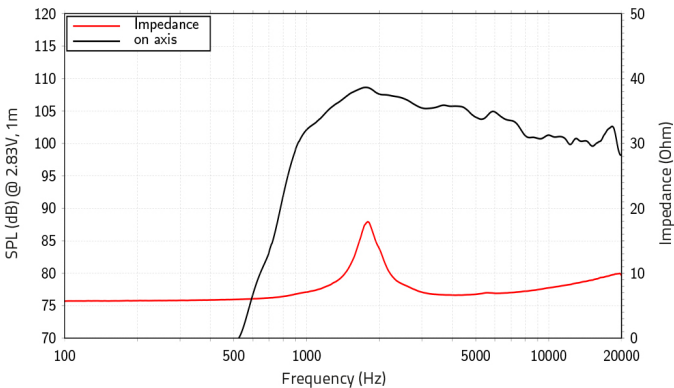

GENERAL SPECIFICATIONS

Throat Diameter	25.4 mm (1 in)
Nominal Impedance	8 ohm
Minimum Impedance	6 ohm
Program Power	30 W Program power is defined as 3 dB greater than AES Power.
AES Power Rating	15 W Horn loaded test for 2h with continuous, band-limited (2000-20000 Hz, 12dB/oct.) pink noise signal as per AES 2-1984 Rev. 2003.
Sensitivity	106 dB Measured on axis at 2.83V, 1m, driver loaded with HD1003 horn, SPL averaged in the frequency range 1500 ÷ 20000 Hz.
Frequency Range	1500 ÷ 20000 Hz
Voice Coil Diameter	25.4 mm (1 in)
Magnet Material	FERRITE
Coil Material	CCA W
Former Material	KAPTON
Diaphragm Geometry	DOM E
Diaphragm	HT POLYMER VENTED
Surround Material	HIGH TEMPERATURE POLYMER
Magnet OD	70 mm (2.8 in)
Voice Coil Inductance	0.09 mH
Flux Density	1.35 T
Recommended Crossover	2000 Hz High pass filter with slope 12dB/oct. or higher.
Driver Displacement Volume	0.1 l (0.004 ft³)

DIMENSIONS

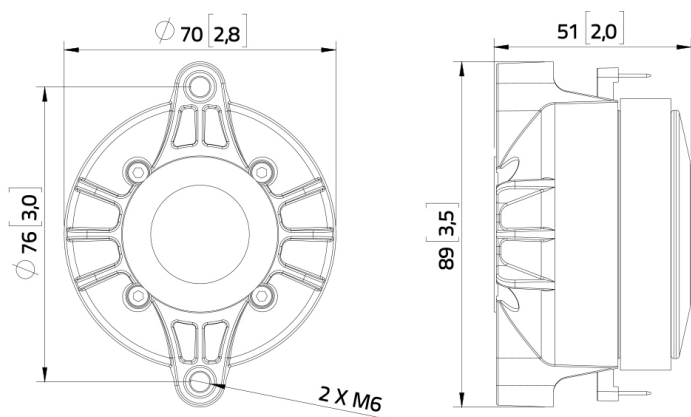

SHIPPING INFORMATION

Net Weight	0.47 kg (1.036 lb)
Multipack Quantity	24
Multipack size W x D x H	460 mm x 267 mm x 158 mm (18.1 in x 10.5 in x 6.2 in)
Multipack Weight	12.9 kg (28.44 lb)



WWW.LAVOCESPEAKERS.COM



Lavoce

sales@lavocespeakers.com sales.cn@lavocespeakers.com