

15CLA76 8 Ω**Woofer**

- 700 W continuous program power capacity
- 76 mm (3 in) aluminium voice coil
- 40 - 3000 Hz response
- 99 dB sensitivity
- Ventilated voice coil gap for reduced power compression
- Aluminium demodulating ring for very low distortion

Careful optimization of our lightest woofer series, now offered with a high temperature copper-clad aluminum voice coil, is rewarded with higher sensitivity and smoother high frequency response. An efficiently designed motor makes these a good fit for many more applications, especially where flown, and manufacturing design means the CLA series can be price competitive with ferrite motor designs offering similar performance.



15CLA76 8 Ω

Woofers
SPECIFICATIONS

Nominal Diameter	380 mm (15 in)
Nominal Impedance	8 Ω
Minimum Impedance	6 Ω
Nominal Power Handling	350 W
2 hours test made with continuous pink noise signal within the range Fs-10Fs. Power calculated on rated minimum impedance. Loudspeaker in free air.	
Continuous Power Handling	700 W
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	99 dB
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	40 Hz - 3000 Hz
Voice Coil Diameter	76 mm (3 in)
Winding Material	Aluminium
Former Material	Glass Fibre
Winding Depth	16 mm (0.63 in)
Magnetic Gap Depth	11 mm (0.43 in)
Flux Density	1.2 T
Woofers Cone Treatment	WP Waterproof Front Side

PARAMETERS

Thiele-Small parameters are measured after a high level 20 Hz sine wave preconditioning test.

Fs	40 Hz
Re	5.2 Ω
Qes	0.31
Qms	6.9
Qts	0.3
Vas	176 dm³ (6.22 ft³)
Sd	855 cm² (132.53 in²)
η ₀	3.5 %
X _{max}	5.5 mm
X _{var}	7.5 mm
M _{ms}	93 g
Bl	19.8 Tm
Le	0.5 mH
EBP	129 Hz

DESIGN

Surround Shape	Triple Roll
Cone Shape	Exponential
Magnet Material	Neodymium Inside Slug
Spider	Single
Pole Design	Straight Pole
Woofers Cone Treatment	WP Waterproof Front Side
Recommended Enclosure	100 dm³ (3.53 ft³)
Recommended Tuning	50 Hz

MOUNTING AND SHIPPING INFO



Overall Diameter	388 mm (15.28 in)
Bolt Circle Diameter	374 mm (14.72 in)
Baffle Cutout Diameter	353 mm (13.9 in)
Depth	171 mm (6.73 in)
Flange and Gasket Thickness	10 mm (0.39 in)
Air Volume Occupied by Driver	4.4 dm³ (0.16 ft³)
Net Weight	3.8 kg (8.38 lb)
Shipping Units	1 pcs
Shipping Weight	5.1 kg (11.24 lb)
Shipping Box	425x425x224 mm (16.73x16.73x8.82 in)


SERVICE KITS

LF recone-kits	RCK15CLA768
----------------	--------------------

15CLA76 8 Ω

Woofer

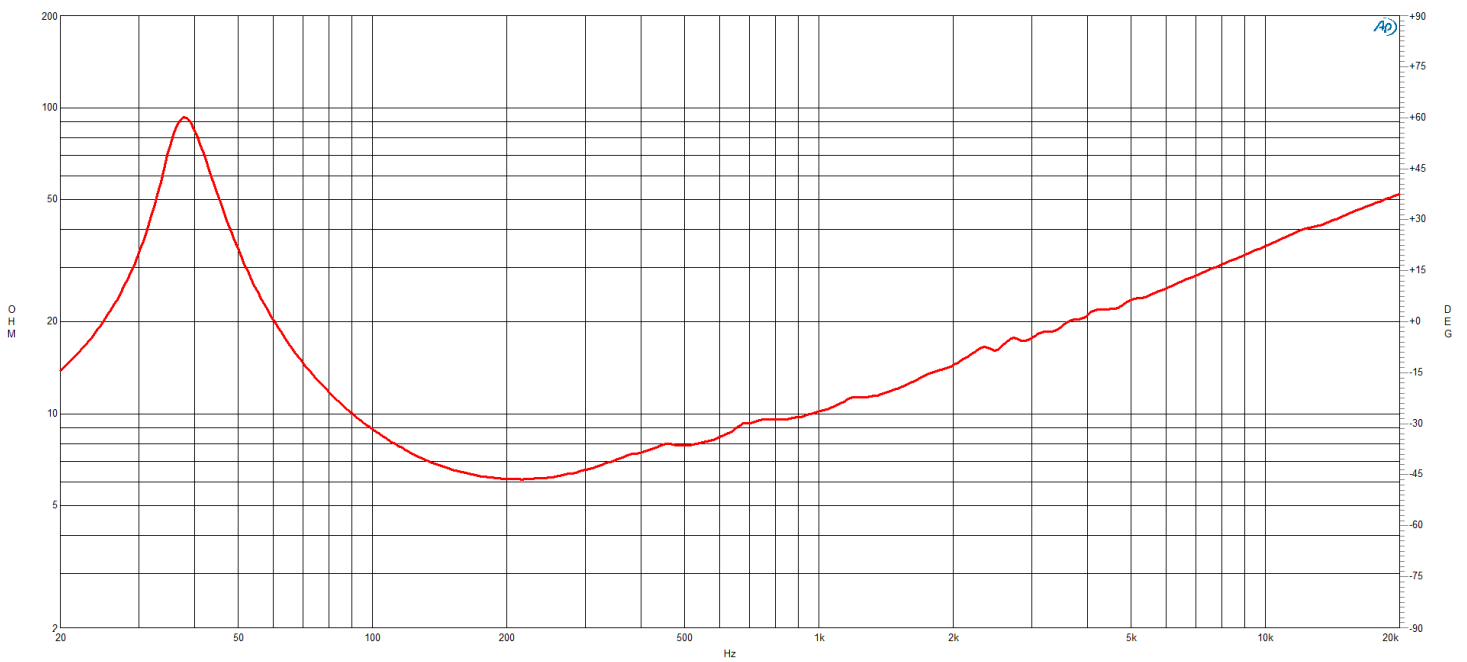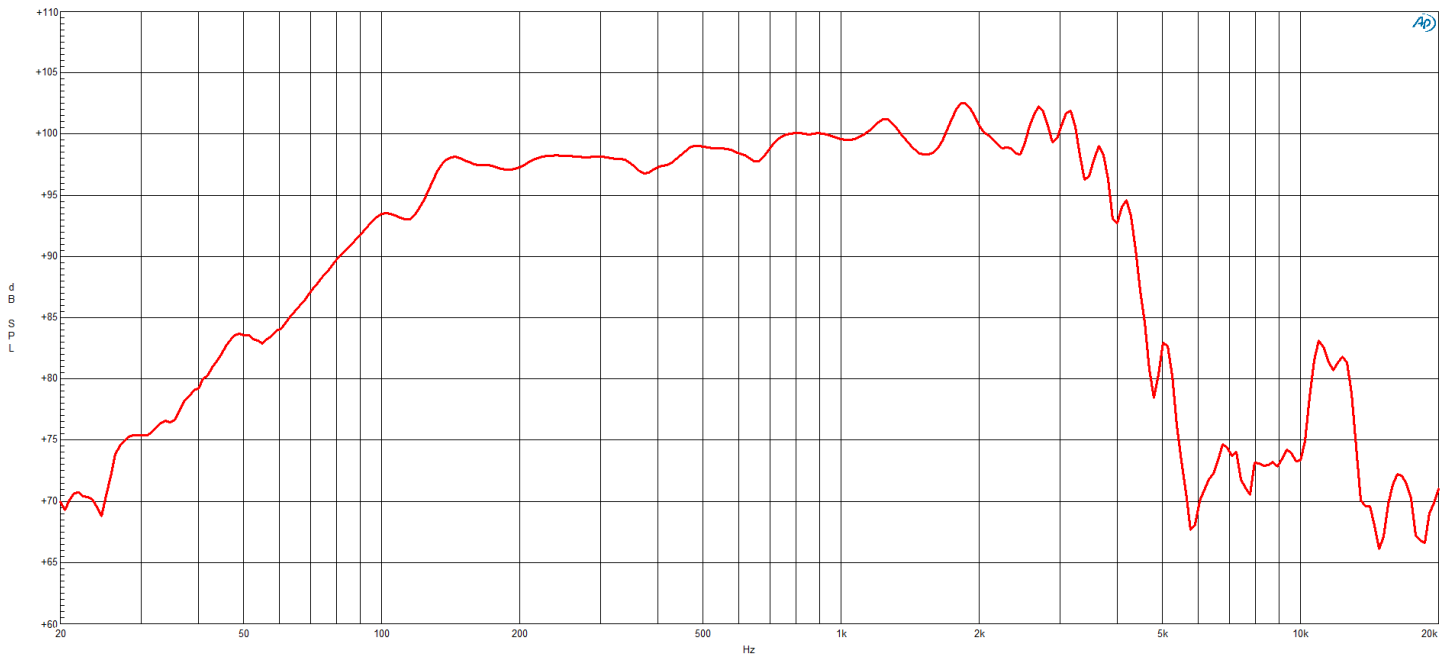

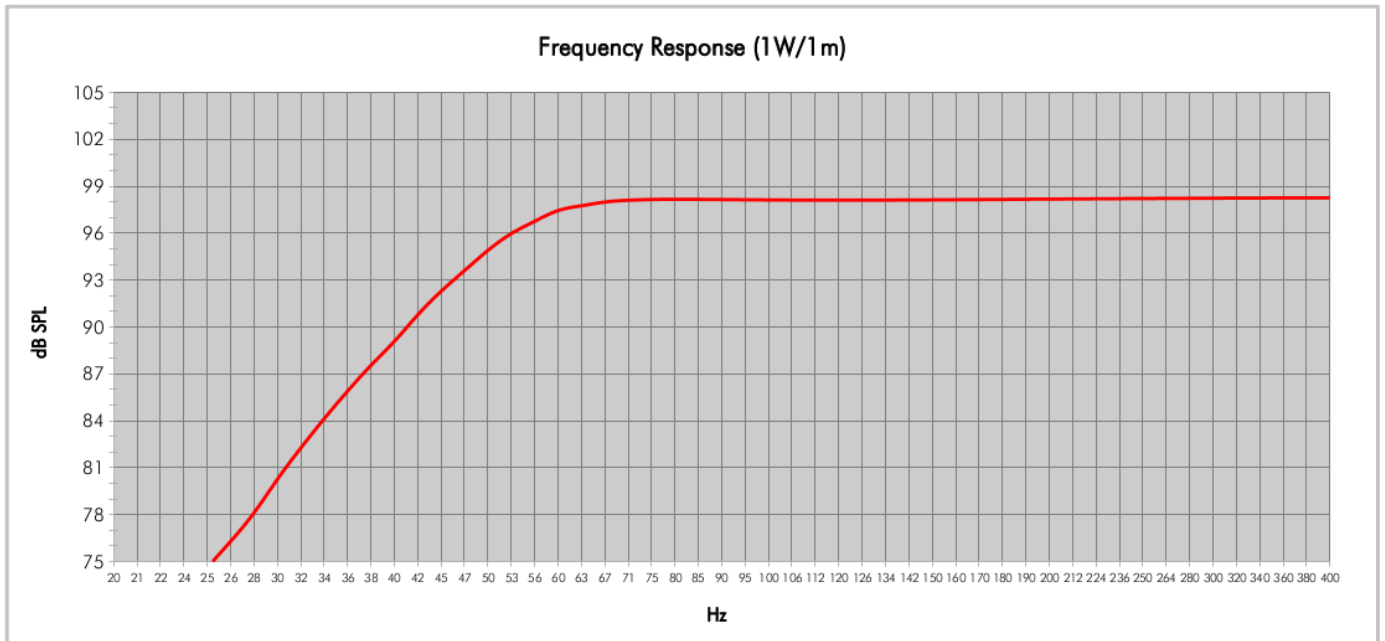

Model:	15CLA76	Configuration:	One Driver
Enclosure Type:	Bass Reflex	QB:	7
Internal Net Volume (Litres):	100	Port Area (cm ²):	140,0
Tuning Frequency (Hz):	50	Port Length (cm):	5,1
Frequency (-3 dB) (Hz):	51,1		
Frequency (-10 dB) (Hz):	39,0		

15CLA76 8 Ω

Woofer

