

## DE5 8 Ω

### SPECIFICATIONS

Driver mounted on B&C ME 45 horn + 1/2" adaptor

Throat Diameter	<b>13 mm (0.5 in)</b>
Nominal Impedance	<b>8 Ω</b>
Minimum Impedance	<b>6.7 Ω</b>
Nominal Power Handling	<b>10 W</b>
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.	
Continuous Power Handling	<b>20 W</b>
Power on Continuous Program is defined as 3 dB greater than the Nominal rating.	
Sensitivity	<b>109 dB</b>
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.	
Frequency Range	<b>2 kHz - 18 kHz</b>
Recommended Crossover	<b>2.5 kHz</b>
12 dB/oct. or higher slope high-pass filter.	
Voice Coil Diameter	<b>25 mm (1 in)</b>
Winding Material	<b>Aluminium</b>
Inductance	<b>0.1 mH</b>
Flux Density	<b>1.65 T</b>
Diaphragm Material	<b>Mylar</b>

### MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter

Overall Diameter	<b>62 mm (2.44 in)</b>
Depth	<b>34 mm (1.33 in)</b>
Net Weight	<b>0.17 kg (0.37 lb)</b>
Shipping Units	<b>1 pcs</b>
Shipping Weight	<b>0.18 kg (0.4 lb)</b>
Shipping Box	<b>65x55x40 mm (2.56x2.17x1.57 in)</b>

### SERVICE KITS

HF replacement-diaphragm	<b>MMDDE58</b>
--------------------------	----------------

- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 1/2" horn throat diameter
- Mylar diaphragm
- 1500 - 18000 Hz response
- 109 dB sensitivity



### TECHNOLOGIES



Available exclusively with 4.8+2.8 mm fast-on terminal tab



**DE5 8 Ω**

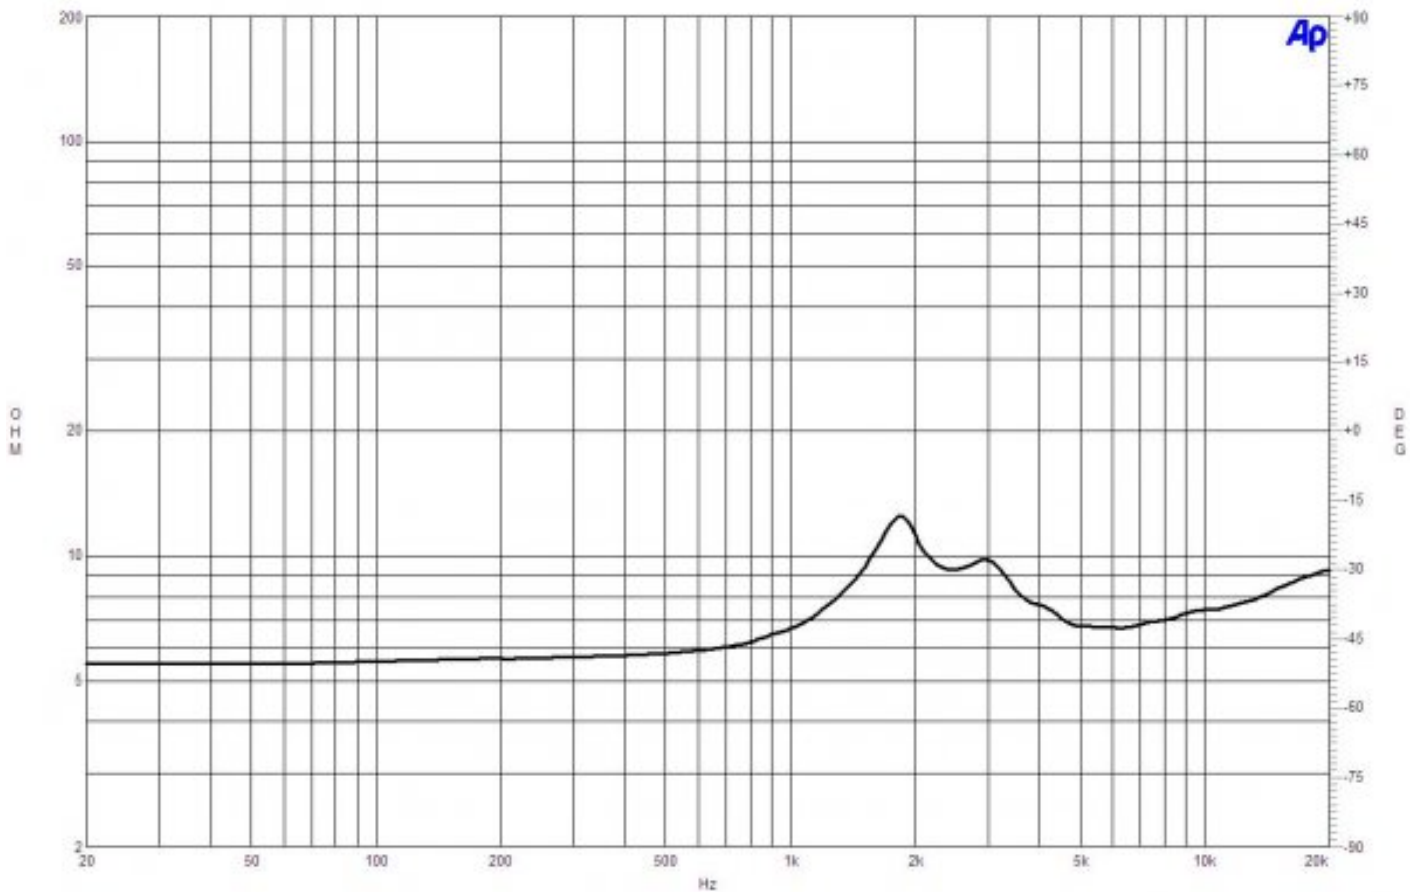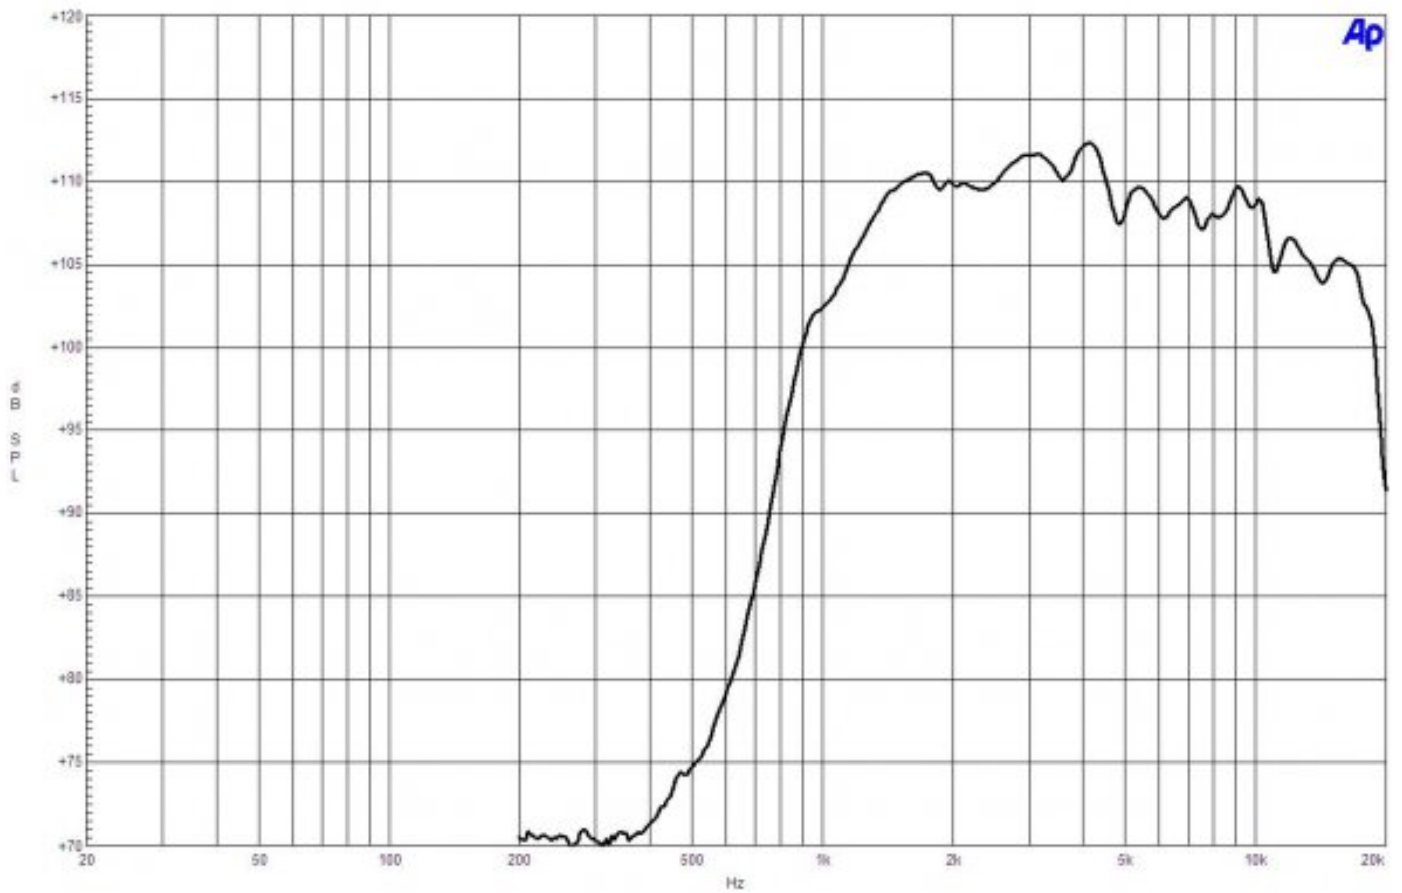

**DE5** 8 Ω

