

DE7 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME7 horn.

| | |
|--|------------------------|
| Throat Diameter | 19 mm (0.75 in) |
| Nominal Impedance | 16 Ω |
| Minimum Impedance | 12 Ω |
| Nominal Power Handling | 10 W |
| 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance. | |
| Continuous Power Handling | 20 W |
| Power on Continuous Program is defined as 3 dB greater than the Nominal rating. | |
| Sensitivity | 109 dB |
| Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance. | |
| Frequency Range | 2 kHz - 18 kHz |
| Recommended Crossover | 2.5 kHz |
| 12 dB/oct. or higher slope high-pass filter. | |
| Voice Coil Diameter | 25 mm (1 in) |
| Winding Material | Aluminium |
| Inductance | 0.16 mH |
| Flux Density | 1.65 T |
| Diaphragm Material | Mylar |

- 20 W continuous program power capacity
- 25 mm (1 in) aluminium voice coil
- 3/4" horn throat diameter
- Polyester diaphragm
- 2000 - 18000 Hz response
- 109 dB sensitivity

Available exclusively with 4.8+2.8 mm fast-on terminal tab

MOUNTING AND SHIPPING INFO

Two M4 holes 180° on 53 mm (2.1 in) diameter



| | |
|------------------|--|
| Overall Diameter | 62 mm (2.44 in) |
| Depth | 35 mm (1.37 in) |
| Net Weight | 0.17 kg (0.37 lb) |
| Shipping Units | 1 pcs |
| Shipping Weight | 0.18 kg (0.4 lb) |
| Shipping Box | 65x55x40 mm (2.56x2.17x1.57 in) |

SERVICE KITS

| | |
|--------------------------|----------------|
| HF replacement-diaphragm | MMDE716 |
|--------------------------|----------------|



DE7 16 Ω

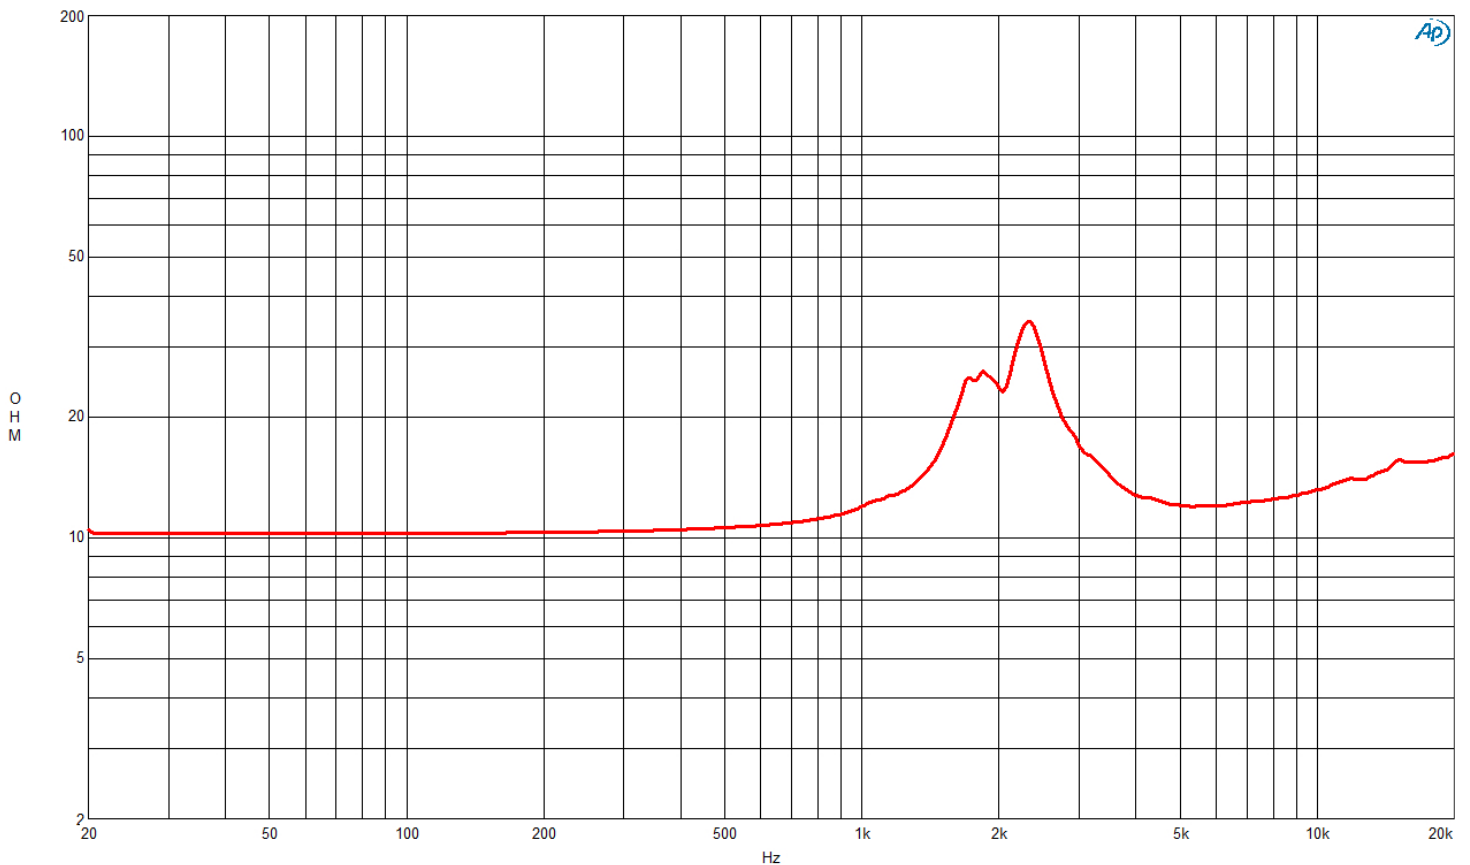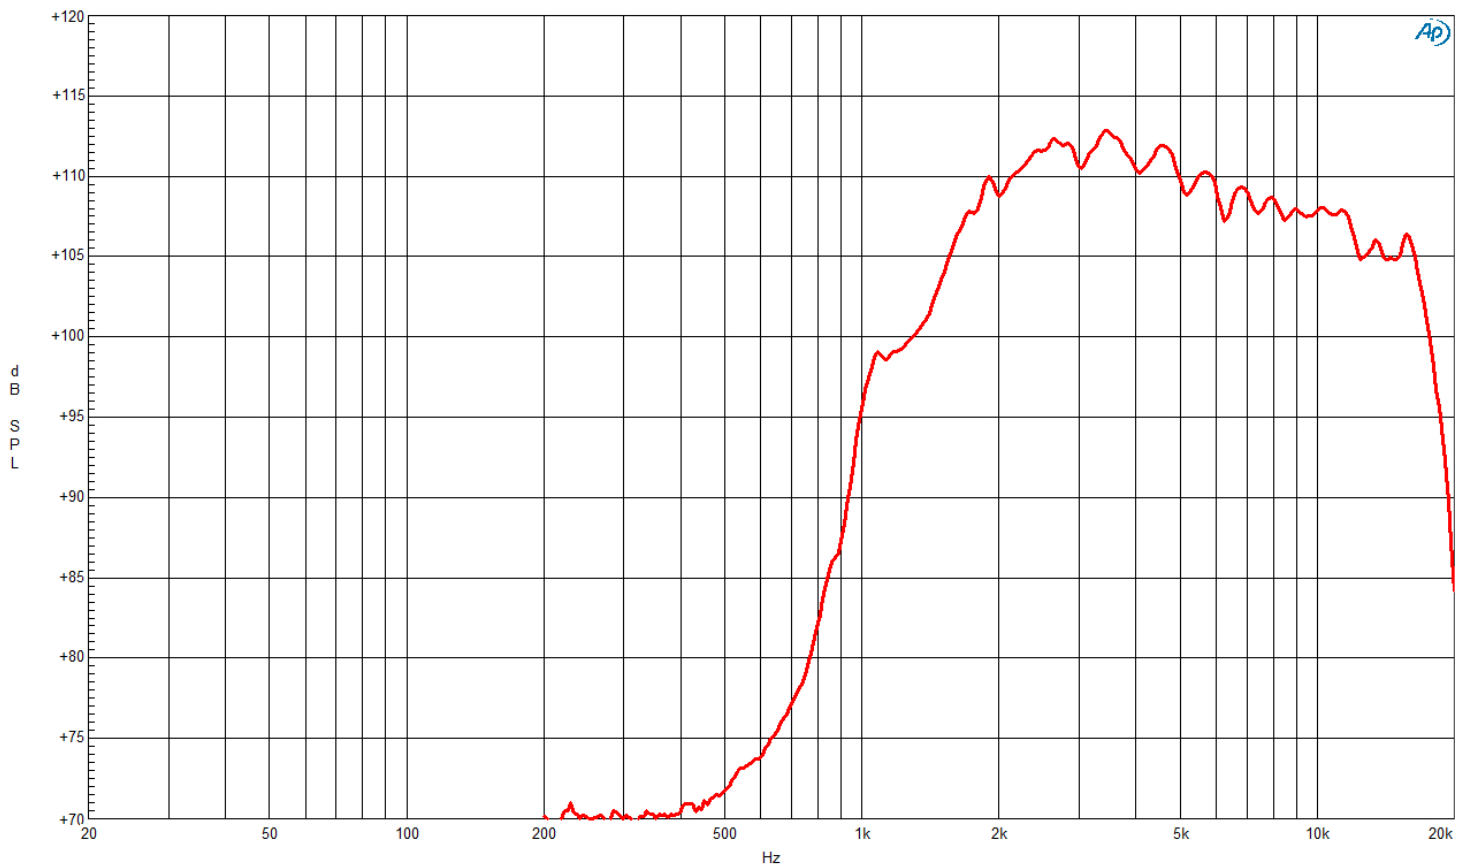

DE7 16 Ω

