

DE1085TN 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME60 horn

Throat Diameter	50 mm (2 in)
Nominal Impedance	16 Ω
Minimum Impedance	11.4 Ω
Nominal Power Handling	140 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	280 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	108 dB
<small>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.</small>	
Frequency Range	0.5 kHz - 20 kHz
Recommended Crossover	0.8 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	100 mm (4 in)
Winding Material	Aluminium
Inductance	0.18 mH
Flux Density	1.95 T
Diaphragm Material	Titanium

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter	154 mm (6.1 in)
Depth	86 mm (3.39 in)
Net Weight	3.7 kg (8.16 lb)
Shipping Units	1 pcs
Shipping Weight	4 kg (8.82 lb)
Shipping Box	190x190x120 mm (7.48x7.48x4.72 in)

SERVICE KITS



HF replacement-diaphragm	MMD4BTN16M
--------------------------	-------------------

- 280 W continuous program power capacity
- 2" horn throat diameter
- 100 mm (4 in) aluminium voice coil
- Titanium diaphragm
- 500 - 20000 Hz response
- 108 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

The DE1085TN is the latest version of our premium 100mm (4.0 in) voice coil, neodymium high frequency driver. The diaphragm in this model has been completely redesigned to incorporate a bent edge voice coil former as well as new dome and surround geometry. These modifications combine to better control diaphragm displacement and deformations, resulting in lower distortion and a smoother higher frequency response above 10kHz.



DE1085TN 16 Ω

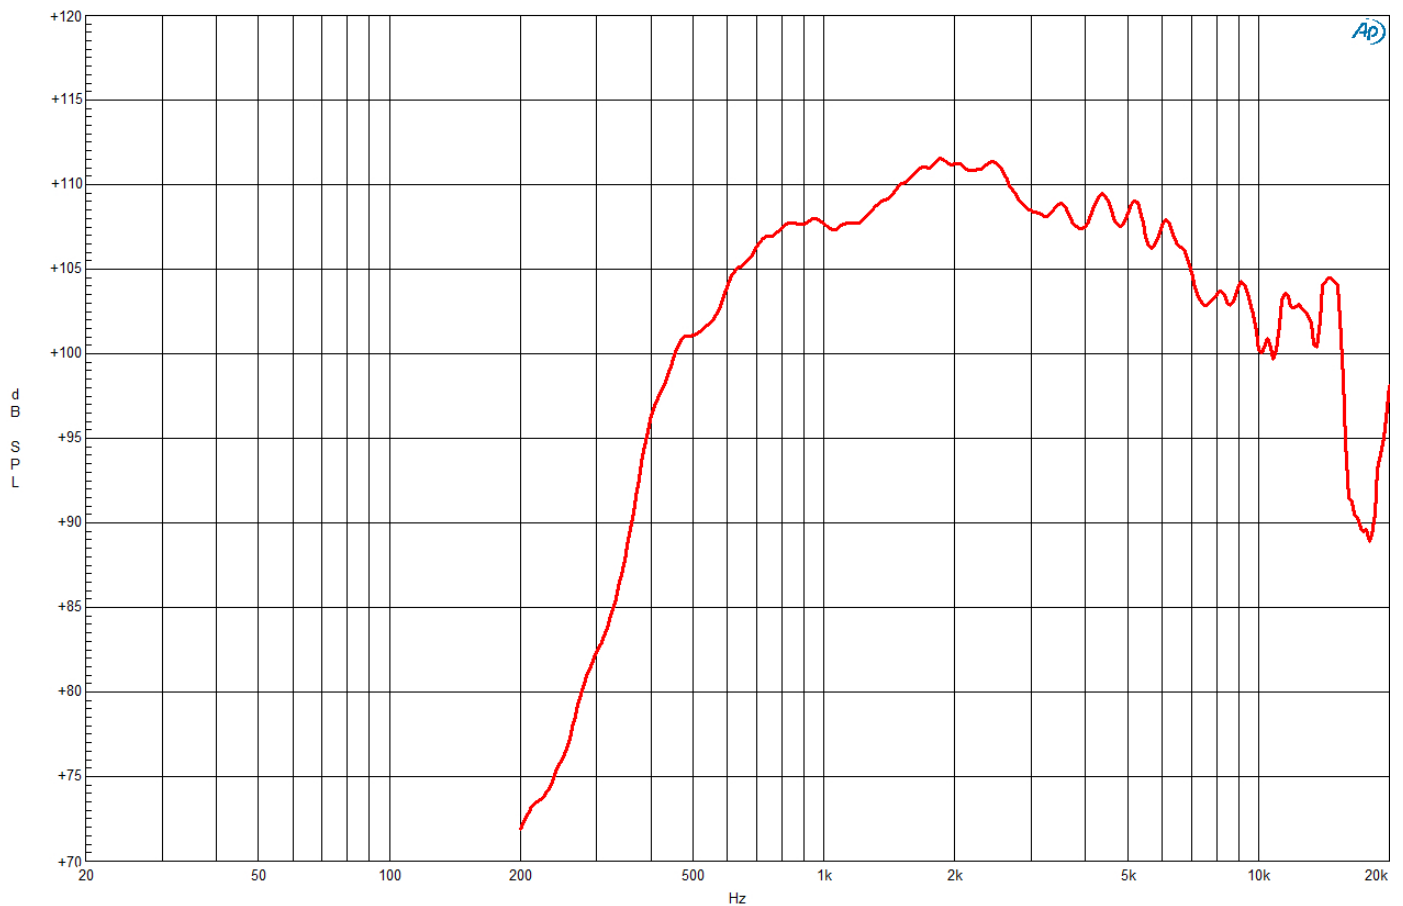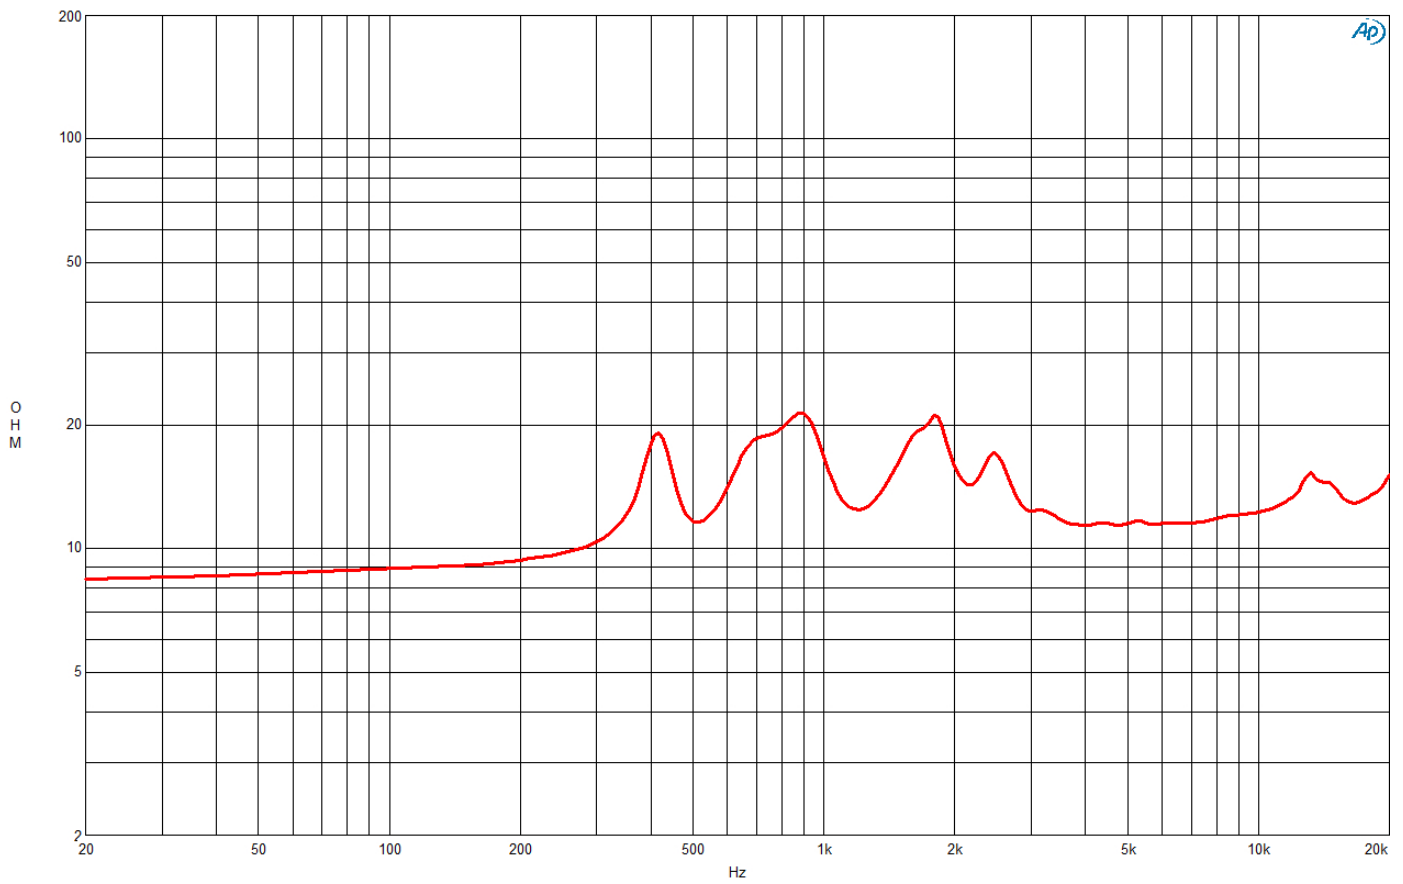

DE1085TN 16 Ω

