

DE910TN 16 Ω

SPECIFICATIONS

Driver mounted on B&C ME 90 horn.

Throat Diameter	33 mm (1.3 in)
Nominal Impedance	16 Ω
Minimum Impedance	10.5 Ω
Nominal Power Handling	110 W
<small>2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.</small>	
Continuous Power Handling	220 W
<small>Power on Continuous Program is defined as 3 dB greater than the Nominal rating.</small>	
Sensitivity	109 dB
<small>Applied RMS Voltage is set to 4 V for 16 ohms Nominal Impedance.</small>	
Frequency Range	0.5 kHz - 18 kHz
Recommended Crossover	1.2 kHz
<small>12 dB/oct. or higher slope high-pass filter.</small>	
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Flux Density	2.05 T
Diaphragm Material	Titanium

- 220 W continuous program power capacity
- 1.3" horn throat diameter
- 75 mm (3 in) aluminium voice coil
- Titanium diaphragm
- 500 - 18000 Hz response
- 109 dB sensitivity
- Neodymium magnet assembly with shorting copper cap

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter



Overall Diameter	131 mm (5.2 in)
Depth	52 mm (2.05 in)
Net Weight	2.4 kg (5.29 lb)
Shipping Units	1 pcs
Shipping Weight	2.45 kg (5.39 lb)
Shipping Box	140x135x62 mm (5.51x5.31x2.44 in)

SERVICE KITS

HF replacement-diaphragm	MMD3BTN16M
--------------------------	-------------------



DE910TN 16 Ω

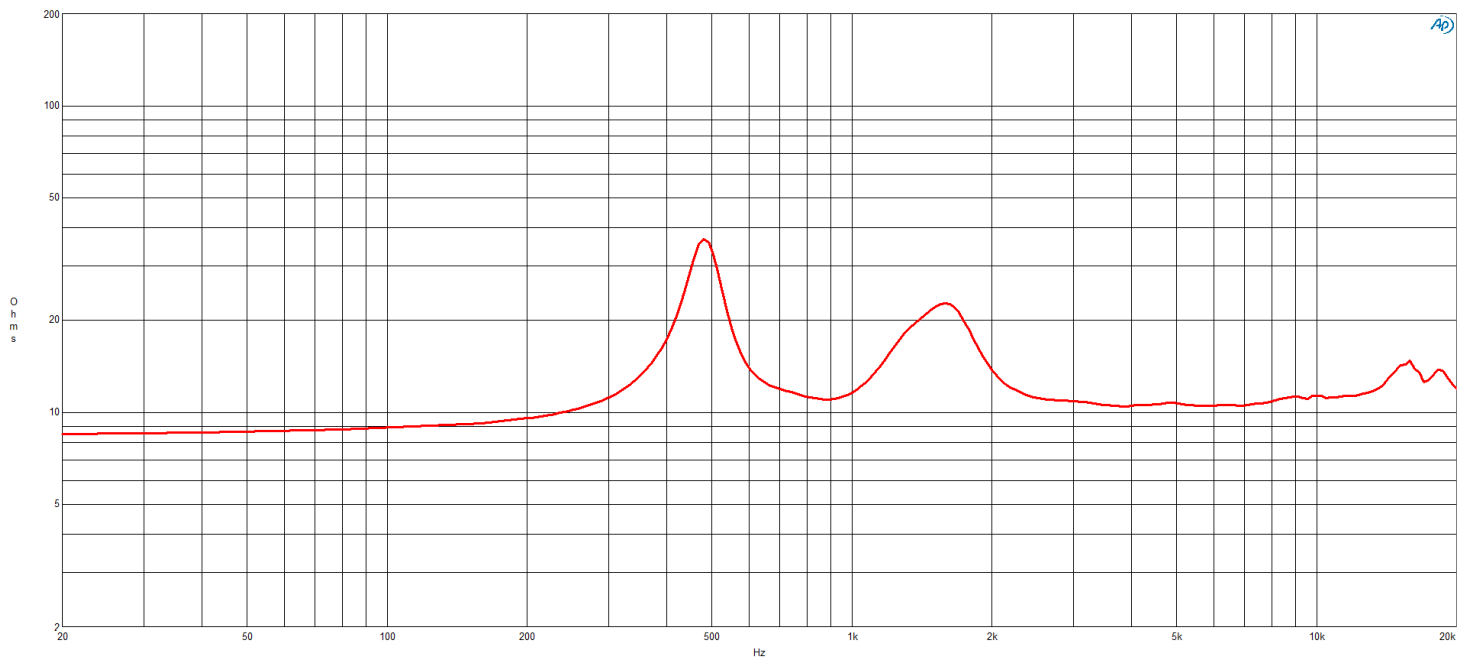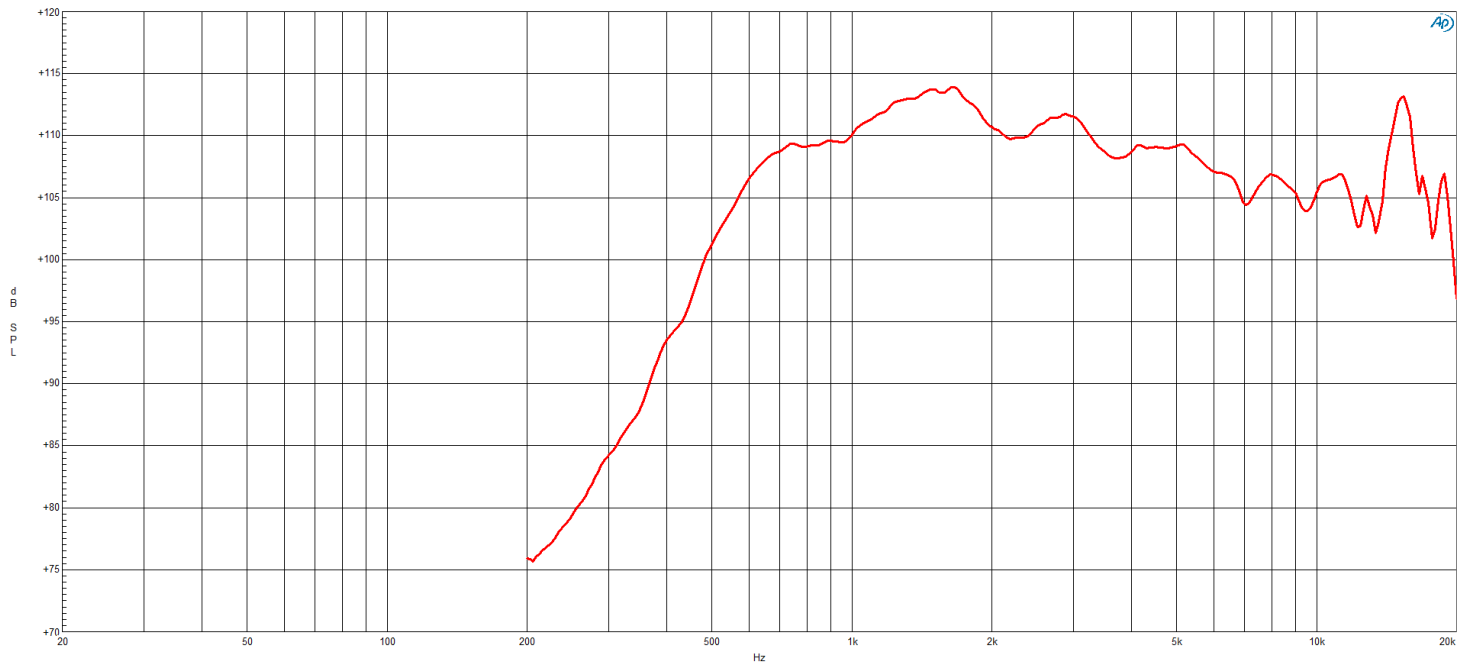

DE910TN 16 Ω

